



1

2

3

4

Document Number: DSP1105

Date: 2011-10-26

Version: 1.0.1

5 **CPU Diagnostics Profile**

6 **Document Type: Specification**

7 **Document Status: DMTF Standard**

8 **Document Language: en-US**

9 Copyright notice

10 Copyright © 2011 Distributed Management Task Force, Inc. (DMTF). All rights reserved.

11 DMTF is a not-for-profit association of industry members dedicated to promoting enterprise and systems
12 management and interoperability. Members and non-members may reproduce DMTF specifications and
13 documents, provided that correct attribution is given. As DMTF specifications may be revised from time to
14 time, the particular version and release date should always be noted.

15 Implementation of certain elements of this standard or proposed standard may be subject to third party
16 patent rights, including provisional patent rights (herein "patent rights"). DMTF makes no representations
17 to users of the standard as to the existence of such rights, and is not responsible to recognize, disclose,
18 or identify any or all such third party patent right, owners or claimants, nor for any incomplete or
19 inaccurate identification or disclosure of such rights, owners or claimants. DMTF shall have no liability to
20 any party, in any manner or circumstance, under any legal theory whatsoever, for failure to recognize,
21 disclose, or identify any such third party patent rights, or for such party's reliance on the standard or
22 incorporation thereof in its product, protocols or testing procedures. DMTF shall have no liability to any
23 party implementing such standard, whether such implementation is foreseeable or not, nor to any patent
24 owner or claimant, and shall have no liability or responsibility for costs or losses incurred if a standard is
25 withdrawn or modified after publication, and shall be indemnified and held harmless by any party
26 implementing the standard from any and all claims of infringement by a patent owner for such
27 implementations.

28 For information about patents held by third-parties which have notified the DMTF that, in their opinion,
29 such patent may relate to or impact implementations of DMTF standards, visit
30 <http://www.dmtf.org/about/policies/disclosures.php>.

31

CONTENTS

33	Introduction	6
34	Document conventions.....	6
35	Typographical conventions	6
36	ABNF usage conventions	6
37	1 Scope	7
38	2 Normative References.....	7
39	3 Terms and Definitions	7
40	4 Symbols and Abbreviated Terms	8
41	5 Synopsis.....	10
42	6 Description	10
43	7 Implementation.....	13
44	7.1 CPU Test Information	13
45	7.2 CIM_CPUDIagnosticTest.....	19
46	7.3 CIM_CPUDIagnosticSettingData	21
47	7.3.1 CIM_CPUDIagnosticSettingData.CPUSpeeds	22
48	7.3.2 CIM_CPUDIagnosticSettingData.CoreVoltages	23
49	7.3.3 CIM_CPUDIagnosticSettingData.Seed.....	23
50	7.3.4 CIM_DiagnosticSettingData.LoopControl.....	23
51	7.3.5 CIM_DiagnosticSettingData.LoopControlParameter	23
52	7.4 CIM_CPUDIagnosticServiceCapabilities	23
53	7.4.1 CIM_CPUDIagnosticServiceCapabilities.SupportedLoopControl.....	24
54	7.4.2 CIM_CPUDIagnosticServiceCapabilities.CPUSpeeds	24
55	7.4.3 CIM_CPUDIagnosticServiceCapabilities.CoreVoltages	24
56	7.4.4 CIM_CPUDIagnosticServiceCapabilities.Seed.....	24
57	8 Methods.....	24
58	8.1 CIM_CPUDIagnosticTest.RunDiagnosticService()	24
59	8.2 Profile Conventions for Operations.....	25
60	9 Use Cases.....	25
61	9.1 Use Case Summary.....	25
62	9.2 Quick Preboot Functional Verification.....	26
63	9.3 Full Preboot Functional Verification	26
64	9.4 Quick Functional Verification	26
65	9.5 Full Functional Verification.....	27
66	9.6 Stress Test.....	27
67	10 CIM Elements.....	27
68	10.1 CIM_CPUDIagnosticTest (Specializes CIM_DiagnosticTest)	28
69	10.2 CIM_CPUDIagnosticSettingData (Specializes CIM_DiagnosticSettingData).....	28
70	10.3 CIM_CPUDIagnosticServiceCapabilities (Specializes	
71	CIM_DiagnosticServiceCapabilities).....	29
72	10.4 CIM_RegisteredProfile.....	29
73	10.5 CIM_AffectedJobElement	29
74	10.6 CIM_AvailableDiagnosticService.....	30
75	10.7 CIM_ElementCapabilities	30
76	10.8 CIM_ElementSettingData (DiagnosticSettingData)	30
77	10.9 CIM_ElementSettingData (JobSettingData)	31

78	10.10 CIM_ElementSoftwareIdentity	31
79	10.11 CIM_HostedService	31
80	10.12 CIM_OwningJobElement	32
81	10.13 CIM_RecordAppliesToElement	32
82	10.14 CIM_ServiceAffectsElement	32
83	10.15 CIM_ServiceAvailableToElement	33
84	10.16 CIM_ServiceComponent.....	33
85	10.17 CIM_UseOfLog	33
86	Annex A (informative) Change Log.....	35

87

88 Figures

89	Figure 1 – CPU Diagnostics Profile: Profile Class Diagram	12
----	---	----

90

91 Tables

92	Table 1 – Referenced Profiles	10
93	Table 2 – Test Type Information	14
94	Table 3 – CIM_CPUDIagnosticTest Property Requirements.....	19
95	Table 4 – CIM_CPUDIagnosticTest Property Requirements.....	20
96	Table 5 – CIM_CPUDIagnosticSettingData Property Requirements.....	21
97	Table 6 – CIM_CPUDIagnosticServiceCapabilities Property Requirements.....	23
98	Table 7 – CPU Diagnostics Profile Use Cases.....	25
99	Table 8 – CIM Elements: CPU Diagnostics Profile.....	27
100	Table 9 – Class: CIM_CPUDIagnosticTest	28
101	Table 10 – Class: CIM_CPUDIagnosticSettingData	28
102	Table 11 – Class: CIM_CPUDIagnosticServiceCapabilities	29
103	Table 12 – Class: CIM_RegisteredProfile.....	29
104	Table 13 – Class: CIM_AffectedJobElement	29
105	Table 14 – Class: CIM_AvailableDiagnosticService.....	30
106	Table 15 – Class: CIM_ElementCapabilities.....	30
107	Table 16 – Class: CIM_ElementSettingData	31
108	Table 17 – Class: CIM_ElementSettingData	31
109	Table 18 – Class: CIM_ElementSoftwareIdentity	31
110	Table 19 – Class: CIM_HostedService	32
111	Table 20 – Class: CIM_OwningJobElement	32
112	Table 21 – Class: CIM_RecordAppliesToElement	32
113	Table 22 – Class: CIM_ServiceAffectsElement	33
114	Table 23 – Class: CIM_ServiceAvailableToElement	33
115	Table 24 – Class: CIM_ServiceComponent.....	33
116	Table 25 – Class: CIM_UseOfLog	34

117

118

Foreword

119 The *CPU Diagnostics Profile* (DSP1105) was prepared by the Diagnostics Working Group of the DMTF.

120 DMTF is a not-for-profit association of industry members dedicated to promoting enterprise and systems
121 management and interoperability. For information about the DMTF, see <http://www.dmf.org>.

122 Acknowledgments

123 The DMTF acknowledges the following individuals for their contributions to this document:

- 124 • Andre Asselin – IBM Corporation
- 125 • Dave Barrett – Emulex
- 126 • Rodney Brown – IBM Corporation
- 127 • Carl Chan – WBEM Solutions, Inc.
- 128 • Ken Kotyuk – Hewlett-Packard Company
- 129 • Kevin Kuelbs – Hewlett-Packard Company
- 130 • Peter Lamanna – EMC Corporation
- 131 • Mike Lowe – Advanced Micro Devices
- 132 • Eric Tend – Hewlett-Packard Company
- 133 • Mike Walker – Storage Networking Industry Association

134

Introduction

135 A *profile* is a collection of Common Information Model (CIM) elements and behavior rules that represents
136 a specific area of management. The purpose of the profile is to ensure interoperability of Web-Based
137 Enterprise Management (WBEM) services for a specific subset of the CIM schema — in this case Optical
138 Drive diagnostics.

139 Diagnostics is a critical component of systems management. Diagnostic services are used in problem
140 containment to maintain availability, achieve fault isolation for system recovery, establish system integrity
141 during boot, increase system reliability, and perform routine proactive system verification. The goal of the
142 Common Diagnostic Model (CDM) is to define industry-standard building blocks, based on and consistent
143 with the DMTF CIM, which enables seamless integration of vendor-supplied diagnostic services into
144 system management frameworks.

145 The goal of the *CPU Diagnostics Profile* is to define industry-standard building blocks that enable
146 seamless problem determination support for CPUs. The profile extends the standard diagnostic profile by
147 identifying a base set of CPU functions that should be diagnosed by provider implementations. Suppliers
148 can differentiate their diagnostic offering by providing this base set of diagnostics and developing
149 diagnostics to analyze proprietary features of the CPU.

150 Document conventions

151 Typographical conventions

152 The following typographical conventions are used in this document:

- 153 • Document titles are marked in *italics*.
- 154 • Important terms that are used for the first time are marked in *italics*.

155 ABNF usage conventions

156 Format definitions in this document are specified using ABNF (see [RFC5234](#)), with the following
157 deviations:

- 158 • Literal strings are to be interpreted as case-sensitive Unicode characters, as opposed to the
159 definition in [RFC5234](#) that interprets literal strings as case-insensitive US-ASCII characters.

160

CPU Diagnostics Profile

161 1 Scope

162 The *CPU Diagnostics Profile* defines the set of classes, properties, methods, and default values needed
163 to perform effective problem determination for processors within a management domain. The set of
164 classes that model CPU presence and CPU characteristics are not described within the scope of this
165 profile.

166 The target audience for this specification is implementers who are writing CIM-based providers or
167 consumers of management interfaces that represent the component described in this document.

168 2 Normative References

169 The following referenced documents are indispensable for the application of this document. For dated
170 references, only the edition cited applies. For undated references, the latest edition of the referenced
171 document (including any amendments) applies.

172 The following referenced documents are indispensable for the application of this document. For dated
173 references, only the edition cited applies. For undated references, the latest edition of the referenced
174 document (including any amendments) applies.

175 DMTF DSP0004, *CIM Infrastructure Specification 2.6*,
176 http://dmtf.org/sites/default/files/standards/documents/DSP0004_2.6.pdf

177 DMTF DSP0200, *CIM Operations over HTTP 1.3*,
178 http://dmtf.org/sites/default/files/standards/documents/DSP0200_1.3.pdf

179 DMTF DSP1001, *Management Profile Specification Usage Guide 1.0*,
180 http://dmtf.org/sites/default/files/standards/documents/DSP1001_1.0.pdf

181 DMTF DSP1002, *Diagnostics Profile 2.0*,
182 http://dmtf.org/sites/default/files/standards/documents/DSP1002_2.0.pdf

183 DMTF DSP1022, *CPU Profile 1.0*
184 http://dmtf.org/sites/default/files/standards/documents/DSP1022_1.0.pdf

185 DMTF DSP1033, *Profile Registration Profile 1.0*,
186 http://dmtf.org/sites/default/files/standards/documents/DSP1033_1.0.pdf

187 IETF RFC5234, *ABNF: Augmented BNF for Syntax Specifications, January 2008*,
188 <http://tools.ietf.org/html/rfc5234>

189 ISO/IEC Directives, Part 2, *Rules for the structure and drafting of International Standards*,
190 <http://isotc.iso.org/livelink/livelink.exe?func=ll&objId=4230456&objAction=browse&sort=subtype>

191 3 Terms and Definitions

192 In this document, some terms have a specific meaning beyond the normal English meaning. Those terms
193 are defined in this clause.

194 The terms "shall" ("required"), "shall not," "should" ("recommended"), "should not" ("not recommended"),
195 "may," "need not" ("not required"), "can" and "cannot" in this document are to be interpreted as described
196 in [ISO/IEC Directives, Part 2](#), Annex H. The terms in parenthesis are alternatives for the preceding term,
197 for use in exceptional cases when the preceding term cannot be used for linguistic reasons. Note that
198 [ISO/IEC Directives, Part 2](#), Annex H specifies additional alternatives. Occurrences of such additional
199 alternatives shall be interpreted in their normal English meaning.

200 The terms "clause," "subclause," "paragraph," and "annex" in this document are to be interpreted as
201 described in [ISO/IEC Directives, Part 2](#), Clause 5.

202 The terms "normative" and "informative" in this document are to be interpreted as described in [ISO/IEC](#)
203 [Directives, Part 2](#), Clause 3. In this document, clauses, subclauses, or annexes labeled "(informative)" do
204 not contain normative content. Notes and examples are always informative elements.

205 The terms defined in [DSP0004](#), [DSP0200](#), and [DSP1001](#) apply to this document.

206 4 Symbols and Abbreviated Terms

207 The following symbols and abbreviations are used in this document.

208 4.1

209 **CDM**

210 Common Diagnostic Model

211 4.2

212 **CIM**

213 Common Information Model

214 4.3

215 **CIMOM**

216 CIM Object Manager

217 4.4

218 **CPU**

219 Central Processor Unit

220 4.5

221 **CRU**

222 Customer Replaceable Unit

223 4.6

224 **FPU**

225 Floating Point Unit

226 4.7

227 **FRU**

228 Field Replaceable Unit

229 4.8

230 **IPC**

231 Inter Processor Communication

232 4.9

233 **LBA**

234 Logical Block Addressing

235	4.10
236	ME
237	Managed Element
238	4.11
239	MMX
240	Matrix Math Extensions instructions using 64-bit registers to support floating point operations
241	4.12
242	MOF
243	Managed Object Format
244	4.13
245	OS
246	Operating System
247	4.14
248	PD
249	Problem Determination
250	4.15
251	PFA
252	Predictive Failure Analysis
253	4.16
254	POST
255	Power-On Self Test
256	4.17
257	RAS
258	Reliability, Availability, Serviceability
259	4.18
260	QA
261	Quality Assurance
262	4.19
263	SIMD
264	Single Instruction Multiple Data instructions used to support parallel computing
265	4.20
266	SLP
267	Service Location Protocol
268	4.21
269	SSE
270	Streaming SIMD Extension instructions using 128-bit registers to support floating point operations
271	4.22
272	SSE2
273	Second-generation SSE instructions, which adds cache control instructions and improved operation for an OS running in 64-bit mode
274	

275 **4.23**
 276 **SSE3**
 277 Third-generation SSE instructions, which adds the capability to work horizontally in a register

278 **4.24**
 279 **WBEM**
 280 Web-Based Enterprise Management

281 **5 Synopsis**

282 **Profile name:** CPU Diagnostics

283 **Version:** 1.0.1

284 **Organization:** DMTF

285 **CIM schema version:** 2.28

286 **Central Class:** CIM_CPUDIagnosticTest

287 **Scoping Class:** CIM_ComputerSystem

288 **Specializes:** Diagnostics Profile version 2.0.0

289 The *CPU Diagnostics Profile* extends the management capability of referenced profiles by adding
 290 common methods for determining that the state of managed processors in a system is optimal.

291
 292 CIM_CPUDIagnosticTest shall be the central class of this profile. The instance of
 293 CIM_CPUDIagnosticTest shall be the Central Instance of this profile. CIM_ComputerSystem shall be the
 294 Scoping Class of this profile. The instance of CIM_ComputerSystem with which the Central Instance is
 295 associated through an instance of CIM_HostedService shall be the Scoping Instance of this profile.

296
 297 The CIM_ManagedElement is CIM_Processor, CIM_ProcessorCore or CIM_HardwareThread or a
 298 subclass of them.

299 Table 1 identifies profiles on which this profile has a dependency.

300

Table 1 – Referenced Profiles

Profile Name	Organization	Version	Description
Diagnostics	DMTF	2.0	Specializes
Profile Registration	DMTF	1.0	Mandatory
CPU	DMTF	1.0	Optional

301 **6 Description**

302 Diagnostic programs can be developed to support two primary diagnostic modes.

303 One mode tests the CPU in an operational state after its operating system has started. In this mode,
 304 diagnostic tests exercise various functional components or collect metrics within the context of a running
 305 system. Typically, most diagnostics in this mode are launched concurrently with other user programs atop
 306 a fully functioning general purpose operating system. Such diagnostics will test functional features (for
 307 example, floating point instructions) and RAS features (for example, stress tests). Testing of operating

308 system functions and other low level component testing is not conducted in this environment because it
309 would disrupt the normal usage of the system.

310 The other mode tests the CPU in a preboot state before a general purpose operating system has been
311 started. In this mode, it is understood that the system is not under normal usage. Thus, invasive and
312 destructive tests can be executed. Typically, diagnostics are launched in this environment for
313 manufacturing quality assurance to test operating system functions and other low-level components.
314 Diagnostics are also run in this mode when serious component errors are suspected in a commercial
315 environment. In either scenario, one cannot assume that even basic OS functions or low-level
316 components (for example, registers) will perform properly. Thus, a small limited function OS may be
317 required to execute some pre-boot diagnostic tests.

318 There may also be a third type of hybrid diagnostic test that is able to provide reduced levels of coverage
319 in a normal running environment and enhanced coverage in a preboot environment.

320 Figure 1 represents the class schema for the *CPU Diagnostics Profile*. For simplicity, the prefix CIM_ has
 321 been removed from the names of the classes.

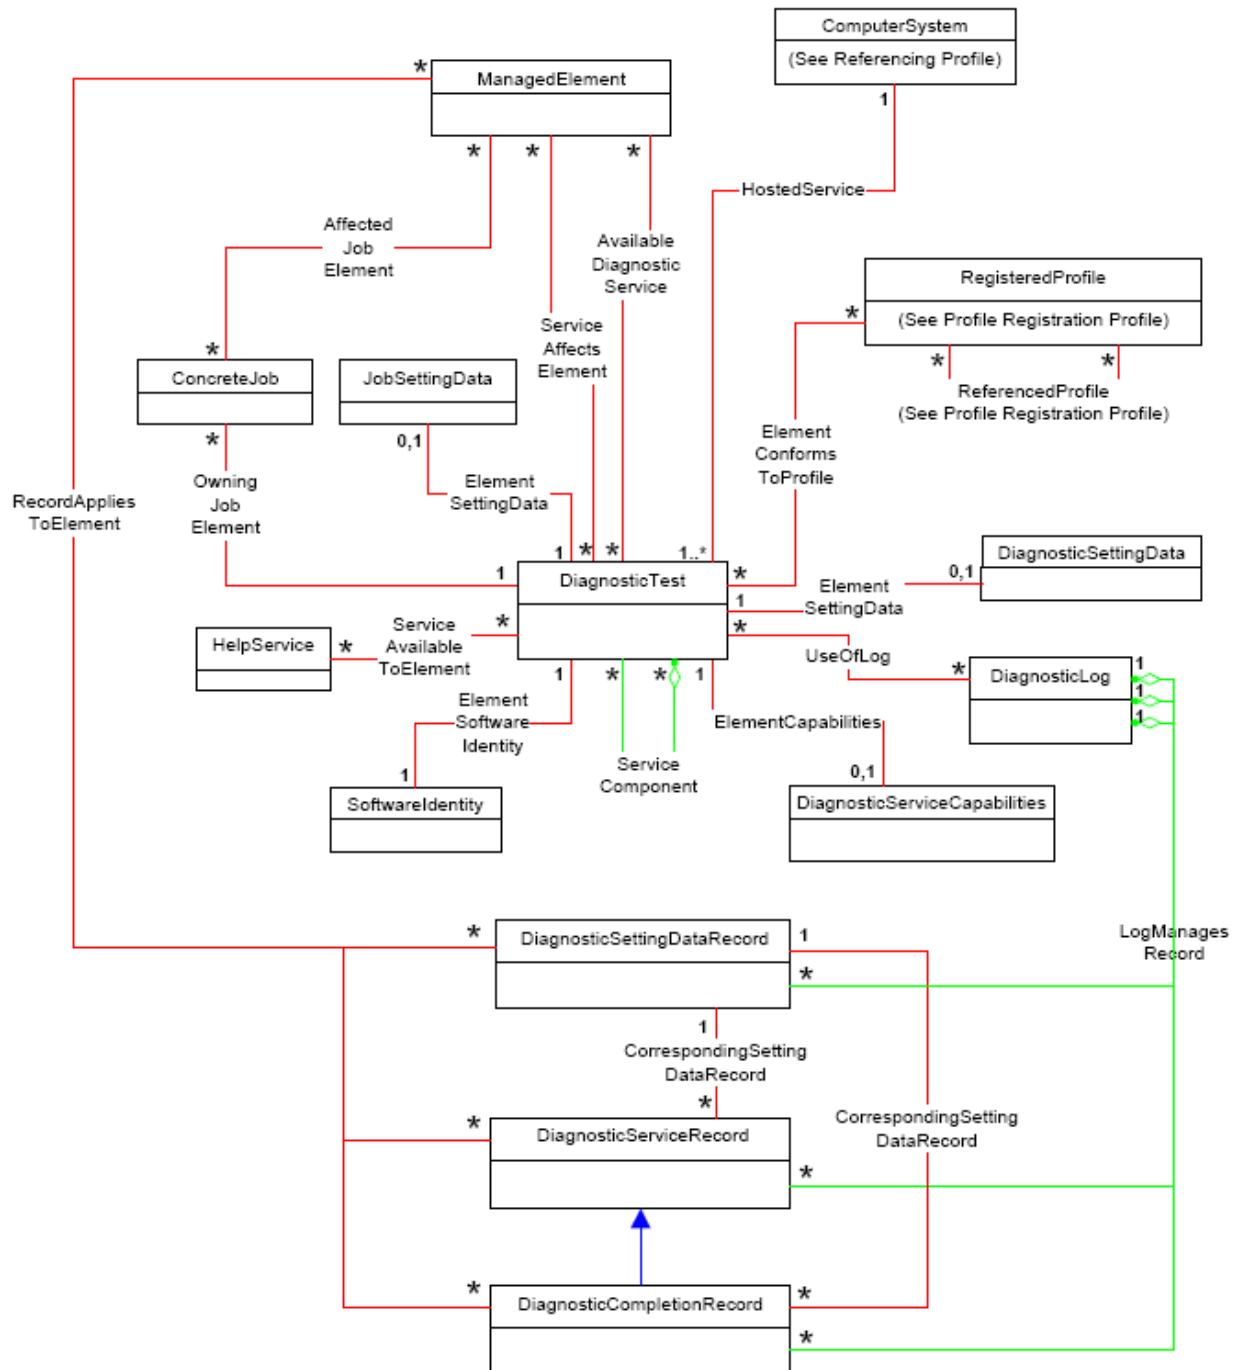


Figure 1 – CPU Diagnostics Profile: Profile Class Diagram

322

323

324

325 7 Implementation

326 This clause details the requirements related to the arrangement of instances and their properties for
327 implementations of this profile.

328 7.1 CPU Test Information

329 This clause outlines the CPU diagnostic categories and test types. While CPU architectures may differ,
330 the intent is to provide an outline that should be applicable to any CPU architecture. The tests are
331 grouped into the following five categories and they are recommended to be run in a bootstrapping manner
332 as outlined below.

333 1) Basic Functionality tests test resource access (registers and memory), arithmetic operations, and
334 control operations. This set of tests should be run first in a pre-production or specialized minimal
335 operating system. This set of tests can then be run again in a standard OS environment upon
336 completion of OS services.

337 2) OS Services tests require a pre-production or specialized operating system to allow control of
338 resources that are restricted from use by application programs.

339 3) RAS (Reliability, Accessibility, and Serviceability) tests test functions of the CPU that are used to
340 assure proper operation, and interrupt/exception handling

341 4) Power/Performance tests assure that the CPU can change frequency and voltage for
342 power/performance tuning.

343 5) System Stress and Coherency tests include I/O interfaces, internal caches, and Inter-Processor
344 Communication (and/or Inter-Core Communication for multi-core CPUs) which is also known as
345 IPC.

346 The tests are also classified as optional or mandatory. It is expected that all test classifications will be
347 developed unless the CPU does not support the features required to perform the tests.

348 NOTE: The diagnostic tests assume that the target CPU is on a motherboard that is at least capable of running a
349 diagnostic OS. In order to run preboot diagnostic tests, a CIMOM must be available.

350 Table 2 provides additional information for each test type. The five categories are broken down into more
351 specifically focused tests. For each test, the following information is provided:

- 352 • Coverage Area – This describes the objectives and intended coverage for the test. It is
353 intentionally abstracted to allow applicability to multiple CPU architectures.
- 354 • Coverage Range – This specifies any specific requirements or restrictions to the test
355 environment or to the scope of the test.
- 356 • User Control – This field specifies the intended user configurability of the test. As a general rule,
357 it is desired that all tests have user controllability to specify the duration of the test. This control
358 allows users to make tradeoffs in coverage versus a test's time/cost of test for their specific
359 manufacturing or diagnostic applications. Some examples of user control are:
 - 360 – Users may specify the degree of processor stressing, which may also affect the
361 execution time of a single iteration.
 - 362 – Users may use Loop control to affect the stress level applied to the processor.
 - 363 – Users may provide a seed for randomization of the test operation to provide test result
364 predictability.

- 365 • Execution Time – This field identifies a rough estimate for how much time the test requires to be
366 effective. For most of the tests, given the speed of CPUs, the execution time will be on the order
367 of seconds or less.
- 368 • Built into Device – This field indicates whether any of the diagnostic capabilities are required to
369 be “built-in,” that is, capable of executing completely internally such that only a command is
370 issued to the device, which then runs internal diagnostics and reports pass/fail.
- 371 • Details – This field lists any additional relevant information or instructions for users of the tests.

372 Table 2 contains information about the test types.

373

Table 2 – Test Type Information

Test Name	Test Information	
Register (Basic Functionality)	Coverage Area	The register test verifies access to all available registers. Basic load and store functions are covered. The test then checks basic addressing modes (register, memory, indirect memory, etc.). Proper data access and movement are the primary focus.
	Coverage Range	These tests should run under either a specialized diagnostic or a production OS.
	User Control	The user may define a subset of addressing modes and/or OS limitations (such as 64-bit registers accessible only in 64-bit mode).
	Execution Time	The diagnostic runs on order of seconds per CPU.
	Built into Device	No
	Details	Addressing modes that are not intended for use in the OS are optional.
Instruction (Basic Functionality)	Coverage Area	This diagnostic verifies the functionality of the general CPU instruction set. All instructions are validated except FPU instructions.
	Coverage Range	These tests should run under either a specialized diagnostic or a production OS.
	User Control	A user may elect a subset of instructions. The selection mechanism is vendor-specific.
	Execution Time	The diagnostic runs on the order of seconds per CPU.
	Built into Device	No
	Details	Instructions that are not intended for use in the OS or application space are optional.
FPU Instruction (Basic Functionality)	Coverage Area	This diagnostic verifies MMX/SSE/SSE2 instructions. The FPU instruction test verifies floating point addition, subtraction, multiplication, and division operations in all supported precision modes against known values. This diagnostic verifies MMX/SSE/SSE2 registers. Transcendental operations (sine, cosine, etc.) are optional, as are precision modes, which are not intended for use.
	Coverage Range	These tests should run under either a specialized diagnostic or a production OS.
	User Control	A user may select a subset of instructions and precision modes. The selection mechanism is vendor-specific.
	Execution Time	The diagnostic runs on the order of seconds per CPU.
	Built into Device	No
	Details	Instructions and precision modes that are not intended for use in the OS or application space are optional.

Test Name	Test Information	
Mixed Instruction Width (Basic Functionality)	Coverage Area	The diagnostic verifies mixed 32-bit and 64-bit instructions and addressing modes in a 64-bit OS.
	Coverage Range	The width test shall provide complete coverage in a 64-bit OS environment only.
	User Control	A user may select a subset of instructions and addressing modes. The selection mechanism is vendor-specific.
	Execution Time	The diagnostic shall run on the order of seconds per CPU.
	Built into Device	No
	Details	The diagnostic verifies the ability of the processor to switch between executing 32-bit and 64-bit instructions, including instructions that load, store, and manipulate data. This diagnostic is not intended to execute all possible instructions and data combinations. This is not a full instruction verification test.
Paging and Protected Mode Entry (OS Services)	Coverage Area	Computer systems may utilize virtual memory methods to extend and homogenize access to system memory and other forms of data storage (for example, hard disks). Page tables contain mappings between virtual addresses and physical locations in memory. A paging diagnostic may test all supported paging modes or may test only those paging modes that are relevant to the system or application. The diagnostic may check detailed paging operation, or may set up specific page tables and assure that the physical data is properly accessed via logical addressing.
	Coverage Range	This test is only valuable in a non-protected-mode preboot OS (for example, DOS) because booting a protected-mode OS requires a functioning page table, a diagnostic OS that allows the user to set up its own page tables that are kept separate from system page tables.
	User Control	None
	Execution Time	The diagnostic runs on the order of milliseconds to seconds per CPU
	Built into Device	No
	Details	The ME may affect the scope of the diagnostic tests. A 64-bit OS may be required to run a complete test on certain processors.
Virtual Machine (OS Services)	Coverage Area	This diagnostic shall verify supported VM instructions and the ability to intercept VM privileged instructions. Validation of additional architecture-specific VM features should fall into this category as well. Also included are any specialized features that expedite VM process switching.
	Coverage Range	This diagnostic shall be executed in a preboot environment or in a specialized diagnostic OS that allows the user to set up its own virtual contexts.
	User Control	None
	Execution Time	The diagnostic shall run on the order of seconds per CPU.
	Built into Device	No
	Details	This diagnostic is optional, because not all CPUs support virtualized operation. This diagnostic should cover all intended production configurations.
Exceptions (OS Services)	Coverage Area	Exceptions are interrupts that are generated internally by the CPU when certain conditions are detected during the execution of a program. At a high level this diagnostic should install exception handlers, generate

Test Name	Test Information	
		exceptions, and verify that the exceptions are handled appropriately.
	Coverage Range	This diagnostic shall provide complete coverage for verifying exception handling in a preboot environment or in a specialized diagnostic OS that allows the user to enable exceptions and either use standard OS exceptions or provide its own exception handlers.
	User Control	None
	Execution Time	The diagnostic runs on the order of milliseconds to seconds per CPU.
	Built into Device	No
	Details	<p>The ME may affect the scope the diagnostic tests. A 64-bit OS may be required for complete testing on certain processors.</p> <p>Test algorithms may be required to determine proper exception handling actions based on the present state of the ME.</p>
Status (RAS)	Coverage Area	<p>This diagnostic shall verify the overall status of the CPU. The method for verifying the status of a CPU will be architecture specific. For example, for x86 architecture CPUs, a machine check could be used. Example CPU features that may be covered are:</p> <ul style="list-style-type: none"> Cache and data path correctable error counts and threshold Error injection into data transactions (including data poisoning) Machine Specific Registers that report status of malfunctions Data cycle or transaction logging features. Triggers that allow data collection or trapping upon specific internal or external events. Debug data collection features that allow access to an extended state of the machine upon a failure. Both in-band and out-of-band and interface access to the state of the machine upon failure.
	Coverage Range	Security and Protection restrictions may depend upon the architecture of the product. Some tests may require a preboot environment or specialized diagnostic OS that allows the user access to these features. Other tests may only be applicable to manufacturer testing.
	User Control	None
	Execution Time	The diagnostic shall run on the order of seconds per CPU.
	Built into Device	No
	Details	
Power Management (Power/ Performance)	Coverage Area	<p>The diagnostic verifies the power management features of the processor such as C-States (Core) where a core halts execution and waits for restart, S-States (System) where disks or other peripheral components are suspended by removing the voltage (content must be saved and restored), and P-States (Processor) where voltage and CPU speed is changed to save power.</p> <p>The diagnostic checks that each state can be entered and exited. It also tests the throttling aspect of power management, sets power consumption parameters in the CPU or in the chipset, and verifies whether the CPU is throttled appropriately (such as speed and voltage). This functionality may be combined with the voltage and frequency tests specified below in this table, as power management activities may provide the necessary sequencing to allow proper voltage and frequency transitions. This</p>

Test Name	Test Information	
		diagnostic may also be run without changing voltage or frequency to check the functional aspects of power management.
	Coverage Range	Restrictions may apply depending on the architecture of the product, so these tests may require a preboot environment or specialized diagnostic OS which allows the user access to these features.
	User Control	<p>A user may select which power states or features to test. The selection mechanism is vendor-specific. The default behavior shall verify all accessible power management features.</p> <p>To test some C-State and S-States (such as sleep and suspend), user interaction may be required.</p>
	Execution Time	The diagnostic shall run on the order of seconds per CPU.
	Built into Device	No
	Details	Test operation may require preboot for complete coverage. Running this test online could cause problems. Thus, DiagnosticTest.Characteristics shall contain the value 4 (Is Risky).
Speed (Power/ Performance)	Coverage Area	This diagnostic shall set and verify various clock speeds within the specification of the processor. At a minimum, the test must verify that the CPU is capable of operating at the maximum clock speed advertised by the CPU. Maximum clock speed may be determined through the processor or through the associated CIM instance representing the processor under test.
	Coverage Range	This diagnostic shall provide the ability to set the frequency of the device to all legal operational settings. Typically, changes of frequency are applicable to both performance and power management specifications. Some changes will require software or hardware sequencing (such as power state transitions or thermal throttling) in order to properly execute a change in frequency. In addition, if the device or board has the ability to alter voltage, some frequency changes will be combined with voltage changes.
	User Control	The user may be given the option to select a subset of the speeds and sequences to be tested.
	Execution Time	The diagnostic shall run on the order of seconds per CPU.
	Built into Device	No
	Details	After the diagnostic completes, this test will set the CPU speed back to the speed at which the CPU was running before the test was invoked. The test should check if the CPU speed gets changed while the test is running (such as thermal throttling; if so, the test should generate an appropriate DiagnosticServiceRecord instance.
Voltage (Power/ Performance)	Coverage Area	The diagnostic shall set and verify various core voltages. At a minimum the test shall verify that the processor operates appropriately at the maximum voltage specification for the processor.
	Coverage Range	The diagnostic may provide the ability to set the voltage of the device to all legal operational settings, provided that the silicon or board infrastructure allows user control of this feature. There may be a need to write to off-chip resources via IO to accomplish these voltage changes. Typically, changes of voltage are applicable to both performance as well as power management specifications. Some changes (such as power state transitions or thermal throttling) will require software or hardware sequencing in order to properly execute a change in voltage.
	User Control	The user may be given the option to specify the voltages to be used during the test. Additional logic may be required in the provider to determine if

Test Name	Test Information	
		specified values are valid for the processor specification. The diagnostic shall generate an appropriate DiagnosticServiceRecord instance in this scenario and should exit without running the diagnostic.
	Execution Time	The diagnostic shall run on the order of seconds per CPU.
	Built into Device	No
	Details	<p>It is possible for the voltage to change during execution of this test. The implementation shall detect voltage changes and report an appropriate message within a DiagnosticServiceRecord. Failure messages should indicate whether a failure was due to an unexpected value for the voltage or a voltage change by an external entity.</p> <p>After the diagnostic completes, this test will set the CPU voltage back to the voltage at which the CPU was running before the test was invoked.</p> <p>The test will check whether the CPU voltage changes while the test is running (such as thermal throttling); if so, the test will perform vendor-specific actions.</p>
Stress (System Stress and Coherency)	Coverage Area	The CPU stress test uses a variety of instruction sets that enable complete access to CPU operations, caches, and memory. Any subsystem (such as cores, threads, caches, bus interfaces, etc.) that can function in parallel should be tested simultaneously. Stress testing does not imply that instructions are selected for the purpose of heating up the core. Instead, instructions should be chosen to functionally stress the architectural features of the device (such as the core, IO interfaces, bus interface unit, cache coherency, etc.). The diagnostic shall activate a variety of CPU features simultaneously. This may involve randomization and testing various combinations of functionality.
	Coverage Range	Restrictions may apply depending on the architecture of the product, so these tests may require a preboot environment or specialized diagnostic OS that allows the user access to these features.
	User Control	<p>Users may specify the duration time of the test.</p> <p>Random code sequence testing is particularly effective for these tests. Users may provide a seed for randomization of the test operation to provide test result predictability while still allowing a variety of stressful stimuli.</p>
	Execution Time	The diagnostic shall run on the order of seconds to minutes per CPU.
	Built into Device	No
	Details	<p>The diagnostic can be used as a “burn-in” test by the manufacturer.</p> <p>DiagnosticSettingData.LoopControl is set to 4 (Timer), and DiagnosticSettingData.LoopControlParameter is set to the duration time of the test.</p>
Cache (System Stress and Coherency)	Coverage Area	<p>This diagnostic verifies the integrity and accessibility of all available caches such as the instruction cache, data cache, write policies (write-through, write-back), and coherency protocols. The diagnostics should monitor for protocol and data errors (both correctable and non-correctable).</p> <p>Note that additional associations are required to indicate the managed system elements affected by this test. Associations shall be maintained to indicate AffectedManagedElement relationships with CIM_ComputerSystem, CIM_ProcessorCore, and CIM_Processor (in the case of testing shared cache).</p>

Test Name	Test Information	
	Coverage Range	Restrictions may apply depending on the architecture of the product. Some tests may require a preboot environment or specialized diagnostic OS that allows the user access to these features.
	User Control	The user may set the threshold values for correctable errors.
	Execution Time	The diagnostic runs on the order of milliseconds to minutes per CPU. The typical execution time should be seconds.
	Built into Device	No
	Details	A 64-bit OS is required for a complete test on certain processors. DiagnosticSettingData.LoopControl is set to 5 (Error Count) and DiagnosticSettingData.LoopControlParameter is set to the threshold value.
IPC (System Stress and Coherency)	Coverage Area	This test is applicable to systems with multiple processors only. This diagnostic tests IPC, Caches, Memory, and Bus Controllers, which may be included as part of this diagnostic. Alternatively, this diagnostic may simply re-run the other System Stress and Coherency tests. The diagnostic could also target any features of the CPU architecture that are not covered by the other diagnostic tests listed in this table. Additionally, they should target all possible communication transactions between CPUs, such as interrupt processing, cache coherency testing, and error signaling.
	Coverage Range	Restrictions may apply depending on the architecture of the product, so these tests may require a preboot environment or specialized diagnostic OS that allows the user access to these features.
	User Control	None
	Execution Time	The diagnostic shall run on the order of seconds per CPU.
	Built into Device	No
	Details	

374 **7.2 CIM_CPUDiagnosticTest**

375 The CIM_CPUDiagnosticTest class defines the tests that can be used to diagnose CPU issues. Table 3
 376 and Table 4 list the set of CPU tests defined by this profile, whether the test implementation is Mandatory
 377 or Optional, and the values of certain class properties. An implementation may extend this class and add
 378 vendor-defined tests using the Vendor Defined range of the CPUDiagnosticTestType valuemap.

379 The current values for TestType array property are: 0 (Unknown), 1 (Other), 2 (Functional), 3 (Stress), 4
 380 (Health Check), 5 (Access Test), 6 (Media Verify), 7 (DMTF Reserved), 8 (Vendor Reserved).

381 **Table 3 – CIM_CPUDiagnosticTest Property Requirements**

Test Name	Criteria	ElementName*	CPUTestType	TestType*
Register	Optional	CPU Register Test	2	(2) Functional
Instruction	Optional	CPU Instruction Test	3	(2) Functional
FPU Instruction	Optional	CPU FPU Instruction Test	4	(2) Functional
Mixed Instruction Width	Mandatory	CPU Mixed Instruction Width Test	5	(2) Functional
Paging and	Mandatory	CPU Paging and	6	(2) Functional

Test Name	Criteria	ElementName*	CPUTestType	TestType*
Protected Mode Entry		Protected Mode Entry Test		
Virtual Machine	Mandatory	CPU Virtual Machine Test	7	(2) Functional
Exceptions	Optional	CPU Exceptions Test	8	(2) Functional
Status	Mandatory	CPU Status Test	9	(2) Functional (4) Health Check
Power Management	Mandatory	CPU Power Management Test	10	(2) Functional
Speed	Mandatory	CPU Speed Test	11	(2) Functional
Voltage	Optional	CPU Voltage Test	12	(2) Functional
Stress	Mandatory	CPU Stress Test	13	(3) Stress
Cache	Mandatory	CPU Cache Test	14	(2) Functional
IPC	Optional	CPU IPC Test	15	(2) Functional

382 An asterisk (*) indicates that the property is inherited from the parent class CIM_DiagnosticTest.

383 The current values for the Characteristics array property inherited from the CIM_DiagnosticTest parent
 384 class are: 0 (Unknown), 1 (Other), 2 (Is Exclusive), 3 (Is Interactive), 4 (Is Destructive), 5 (Is Risky), 6 (Is
 385 Package), 7 (Reserved), 8 (Is Synchronous), 9 (Media Required), 10 (Additional Hardware Required).
 386 The OtherCharacteristicsDescription property is used to provide additional information about the nature of
 387 the test. The content of the OtherCharacteristicsDescription property is vendor-specific.

388 The Characteristics property shall contain the value 4 (Is Destructive) for the Sequential Write test. The
 389 property can be NULL for the other tests.

390 **Table 4 – CIM_CPUDiagnosticTest Property Requirements**

Test Name	Characteristics*	OtherCharacteristicsDescriptions*	Comment
Register	1 (Other)	Vendor specific	
Instruction	1 (Other)	Vendor specific	User may select instruction subsets to test that will be architecture specific.
FPU Instruction	1 (Other)	Vendor specific	User may select instruction subsets to test that will be architecture specific.
Mixed Instruction Width	1 (Other)	Vendor specific	User may select instruction subsets to test that will be architecture specific.
Paging and Protected Mode Entry	1 (Other)	Vendor specific	
Virtual Machine	1 (Other)	Vendor specific	
Exceptions	1 (Other)	Vendor specific	
Status			

Test Name	Characteristics*	OtherCharacteristicsDescriptions*	Comment
Power Management	1 (Other) 5 (Is Risky)	Vendor specific	To test some C-State and S-States (such as sleep and suspend), user interaction may be required.
Speed			
Voltage	1 (Other) 3 (Is Interactive)	Vendor specific	
Stress	1 (Other) 6 (Is package)	Vendor specific	
Cache	1 (Other)	Vendor specific	
IPC	1 (Other)	Vendor specific	

391 An asterisk (*) indicates that the property is inherited from the parent class CIM_DiagnosticTest.

392 7.3 CIM_CPUDIagnosticSettingData

393 One or more instances of CIM_CPUDIagnosticSettingData may be implemented. They are associated to
 394 CIM_CPUDIagnosticTest using CIM_ElementSettingData. The vendor-defined default values may be
 395 specified and advertised using an instance of CIM_CPUDIagnosticSettingData that is referenced by the
 396 instance of CIM_ElementSettingData whose property value for IsDefault is 1 (Is Default).

397 A diagnostic test may require parameters to run. Some parameters may affect how the test is run while
 398 other parameters provide the values to be used by the test.

399 CIM_DiagnosticSettingData contains properties that affect how a diagnostic test is run (for example,
 400 LoopControl, QuickMode), how errors are handled (for example, HaltOnError), or how results are logged
 401 (for example, LogOptions). CIM_DiagnosticSettingData is an argument to the
 402 CIM_DiagnosticTest.RunDiagnosticService extrinsic method. If additional properties are needed that
 403 control the behavior of the diagnostic test, then they should be defined in a subclass of
 404 CIM_DiagnosticSettingData.

405 The client may use one of the vendor-defined default CIM_CPUDIagnosticSettingData instances as an
 406 argument to the CIM_CPUDIagnosticTest.RunDiagnosticService extrinsic method. Alternatively, the client
 407 may create its own instance of CIM_CPUDIagnosticSettingData and use it instead.

408 The CIM_CPUDIagnosticSettingData class defines the parameters that may be used by some of the CPU
 409 tests. Table 5 lists these test parameters and shows which tests might use them. An implementation may
 410 extend this class and define additional parameters for any other vendor-defined tests.

411 **Table 5 – CIM_CPUDIagnosticSettingData Property Requirements**

Test Name	ElementName*	CPUSpeeds	CPUVoltages	LoopControl*	LoopControl Parameter*	Seed
Register	CPU Register Test					
Instruction	CPU Instruction Test					
FPU Instruction	CPU FPU Instruction Test					
Mixed Instruction Width	CPU Mixed Instruction Width Test					

Test Name	ElementName*	CPUSpeeds	CPUVoltages	LoopControl*	LoopControl Parameter*	Seed
Paging and Protected Mode Entry	CPU Paging and Protected Mode Entry Test					
Virtual Machine	CPU Virtual Machine Test					
Exceptions	CPU Exceptions Test					
Status	CPU Status Test					
Power Management	CPU Power Management Test					
Speed	CPU Speed Test	Used				
Voltage	CPU Voltage Test		Used			
Stress	CPU Stress Test			4 (Timer)	Used	Used
Cache	CPU Cache Test			5 (Error Count)	Used	
IPC	CPU IPC Test					

412 An asterisk (*) indicates that the property is inherited from the parent class CIM_DiagnosticSettingData

413 If any CIM_CPUDiagnosticSettingData property does not have a value when passed as an argument to
 414 the CIM_DiagnosticTest.RunDiagnosticService extrinsic method, then the default values for the test
 415 arguments shall be used. The default values are defined by the test implementer.

416 NOTE: The Test Names shown with an asterisk (*) indicate tests that have user controls. However, such controls
 417 are too dependent upon the CPU architecture to be generically defined as a
 418 CIM_CPUDiagnosticSettingData property. Instead, a vendor should define such properties in a subclass of
 419 CIM_CPUDiagnosticSettingData.

420 7.3.1 CIM_CPUDiagnosticSettingData.CPUSpeeds

421 This array property is used by a client for the tests shown in Table 5 to specify the CPU speeds to be
 422 used during the test.

423 The vendor-defined default value is advertised using the default instance of
 424 CIM_CPUDiagnosticSettingData.

425 The vendor-defined default value is specified using an instance of CIM_CPUDiagnosticSettingData that is
 426 referenced by the instance of CIM_ElementSettingData whose property value for IsDefault is 1 (Is
 427 Default).

428 The vendor-defined maximum value is specified using an instance of CIM_CPUDiagnosticSettingData
 429 that is referenced by the instance of CIM_ElementSettingData whose property value for IsMaximum is 1
 430 (Is Maximum).

431 The vendor-defined minimum value is specified using an instance of CIM_CPUDiagnosticSettingData that
 432 is referenced by the instance of CIM_ElementSettingData whose property value for IsMinimum is 1 (Is
 433 Minimum).

434 If no value is specified, the vendor-defined default values will be used.

435 **7.3.2 CIM_CPUDIagnosticSettingData.CoreVoltages**

436 This array property is used by a client for the tests shown in Table 5 to specify the voltages to be used
437 during the test.

438 The vendor-defined default value is advertised using the default instance of
439 CIM_CPUDIagnosticSettingData.

440 The vendor-defined maximum value is specified using an instance of CIM_CPUDIagnosticSettingData
441 that is referenced by the instance of CIM_ElementSettingData whose property value for IsMaximum is 1
442 (Is Maximum).

443 The vendor-defined minimum value is specified using an instance of CIM_CPUDIagnosticSettingData that
444 is referenced by the instance of CIM_ElementSettingData whose property value for IsMinimum is 1 (Is
445 Minimum).

446 If no value is specified, the vendor-defined default values will be used.

447 **7.3.3 CIM_CPUDIagnosticSettingData.Seed**

448 This property is used by a client for the Stress test shown in Table 5 to specify the seed to use when
449 random combinations of tests or test values are used.

450 **7.3.4 CIM_DiagnosticSettingData.LoopControl**

451 To specify the time that the Stress test runs, the client sets this property to 4 (Timer).

452 To specify the threshold error count for the Cache test, the client sets this property to 5 (Error Count).

453 **7.3.5 CIM_DiagnosticSettingData.LoopControlParameter**

454 To specify the time that the Stress test runs, the client sets this property to the desired length of time.

455 To specify the threshold error count for the Cache test, the client sets this property to the threshold value

456 **7.4 CIM_CPUDIagnosticServiceCapabilities**

457 The SupportedLoopControl property lists the loop controls that are supported by the Diagnostic Service.
458 The values are: 0 (Unknown), 1 (Other), 2 (Continuous), 3 (Count), 4 (Timer), 5 (ErrorCount), 0x8000 (No
459 Loop Control)

460 Table 6 specifies the possible values for each test for CIM_CPUDIagnosticServiceCapabilities.

461 **Table 6 – CIM_CPUDIagnosticServiceCapabilities Property Requirements**

Test Name	SupportedLoopControl*	CPUSpeeds	CoreVoltages	Seed
Register	0x8000 (No Loop Control)			
Instruction	0x8000 (No Loop Control)			
FPU Instruction	0x8000 (No Loop Control)			
Mixed Instruction Width	0x8000 (No Loop Control)			
Paging and	0x8000 (No Loop Control)			

Test Name	SupportedLoopControl*	CPUSpeeds	CoreVoltages	Seed
Protected Mode Entry				
Virtual Machine	0x8000 (No Loop Control)			
Exceptions	0x8000 (No Loop Control)			
Status	0x8000 (No Loop Control)			
Power Management	0x8000 (No Loop Control)			
Speed	0x8000 (No Loop Control)	Used		
Voltage	0x8000 (No Loop Control)		Used	
Stress	4 (Timer)			Used
Cache	5 (Error Count)			
IPC	0x8000 (No Loop Control)			

462 An asterisk (*) indicates that the property is inherited from the parent class CIM_DiagnosticServiceCapabilities

463 7.4.1 CIM_CPUDiagnosticServiceCapabilities.SupportedLoopControl

464 This array property is used by a provider for the tests shown in Table 6 to specify whether or not the test
 465 supports loop control. If loop control is not supported, the value of this property is 0x8000 (No Loop
 466 Control). If the test is to be run for a specified amount of time, this array property shall contain the value 4
 467 (Timer). If the test is to be run until a threshold error count is reached, this array property shall contain the
 468 value 5 (Error Count).

469 7.4.2 CIM_CPUDiagnosticServiceCapabilities.CPUSpeeds

470 This array property is used by a provider for the tests shown in Table 6 to specify the CPU speeds
 471 supported by the test.

472 7.4.3 CIM_CPUDiagnosticServiceCapabilities.CoreVoltages

473 This array property is used by a provider for those tests shown in Table 6 to specify the voltages
 474 supported by the test.

475 7.4.4 CIM_CPUDiagnosticServiceCapabilities.Seed

476 For those tests shown in Table 6, this boolean property indicates that one can specify the seed for a
 477 random sequence to be used by the test.

478 8 Methods

479 This clause details the requirements for supporting intrinsic operations and extrinsic methods for the CIM
 480 elements defined by this profile.

481 8.1 CIM_CPUDiagnosticTest.RunDiagnosticService()

482 The RunDiagnosticService method shall return one of the return code values defined in [DSP1002](#), Table
 483 2 – RunDiagnosticService Method: Return Code Values.

484 When failures occur during the execution of a diagnostic test, the failure shall be recorded in the instance
 485 of CIM_DiagnosticServiceRecord associated with the test. The reason for the failure shall be recorded in
 486 CIM_DiagnosticServiceRecord.ErrorCode[] and the corresponding
 487 CIM_DiagnosticServiceRecord.ErrorCount[] shall be incremented. Other occurrences of the same failure
 488 during the same test shall not create additional entries in CIM_DiagnosticServiceRecord.ErrorCode[], but
 489 they shall cause the corresponding CIM_DiagnosticServiceRecord.ErrorCount[] to be incremented.

490 **8.2 Profile Conventions for Operations**

491 Support for operations for each profile class (including associations) shall be as mandated in [DSP1002](#)
 492 clauses 8.5 through 8.29.

493 **9 Use Cases**

494 This clause contains use cases for the *CPU Diagnostics Profile*.

495 How to discover, configure and run the individual diagnostic tests is detailed in [DSP1002](#). This clause
 496 focuses on how to use the Optical Drivediagnostic tests to diagnose common memory issues.

497 **9.1 Use Case Summary**

498 This clause contains object diagrams and use cases for the *CPU Diagnostics Profile*.

499 This clause should be read in combination with the use cases described in the *Diagnostics Profile*
 500 ([DSP1002](#)), which defines the common methodology for discovering, configuring, and executing
 501 diagnostic tests on a system. The following use case descriptions provide the additional information for
 502 running the CPU-specific diagnostic tests.

503 Table 7 summarizes the use cases that are described in this clause. The use cases are categorized and
 504 named, and references are provided to the clauses that further describe each use case.

505 The CIM_ prefix has been omitted from the class names in the use cases for readability.

506 **Table 7 – CPU Diagnostics Profile Use Cases**

Category	Tests	Description
Quick Preboot Verification	Paging and Protected Mode Entry, Registers	Provides quick verification that basic components and OS functions operate properly. See 9.2.
Full Preboot Verification	Paging and Protected Mode Entry, Registers, Virtual Machine, Exceptions	Provides additional verification that other OS functions operate properly. See 9.3.
Quick Functional Verification	Status, Instructions, Mixed Instruction Width	Provides quick verification of basic functionality with no to minimal user interaction required. See 9.4.
Full functional verification	Status, FPU Instructions, Mixed Instruction Width, Cache, Speed, Voltage, Power Management, IPC	Provides full verification of basic functionality with possible user interaction required. See 9.5.
Stress	Stress	Provides stress testing. See 9.6.

507 Before performing the use cases in this profile, it is assumed that a client has already utilized the use
 508 case methodology defined in the [Diagnostics Profile](#) to discover the following instances:

- 509 • ManagedSystemElement (that is, CPU) instances to be tested

- 510 • CPUDiagnosticTest instances to be used by this profile
- 511 • CPUDiagnosticSettingData instances to be used by this profile that will be passed to the
- 512 CPUDiagnosticTest.RunDiagnosticService extrinsic method.

513 9.2 Quick Preboot Functional Verification

514 To quickly verify that basic components of a CPU are operating properly before the system is booted, a
515 client performs the following steps:

- 516 1) Select the ManagedSystemElement instance to be tested.
- 517 2) Initialize the property values of DiagnosticSettingData as desired (for example HaltOnError,
518 LogOptions, etc.).
- 519 3) Select the CPUDiagnosticTest instance that tests page tables, that is, CPUTestType = 6 (Paging
520 and Protected Mode Entry).
- 521 4) Invoke the CPUDiagnosticTest.RunDiagnosticService extrinsic method using the instances from
522 Step 1 and 2 as arguments.
- 523 5) Repeat Steps 2, 3, and 4 for launching the diagnostic tests for Registers.

524 NOTE: Any failures probably indicate serious functional problems that would probably cause other tests to fail.

525 9.3 Full Preboot Functional Verification

526 To more completely verify the proper operation of a CPU before the system is booted, a client performs
527 the following steps:

- 528 1) Select the ManagedSystemElement instance to be tested.
- 529 2) Initialize the property values of DiagnosticSettingData as desired (for example, HaltOnError,
530 LogOptions, etc.).
- 531 3) Select the CPUDiagnosticTest instance that tests page tables, that is, CPUTestType = 6 (Paging
532 and Protected Mode Entry).
- 533 4) Invoke the CPUDiagnosticTest.RunDiagnosticService extrinsic method using the instances from
534 Step 1 and 2 as arguments.
- 535 5) Repeat Steps 2, 3, and 4 for launching the diagnostic tests for Registers, Virtual Machine, and
536 Exceptions.
- 537 6) Repeat Steps 2, 3, and 4 for testing FPU Instructions, Registers, Cache, Speed, and Power
538 Management.

539 9.4 Quick Functional Verification

540 To quickly verify the proper operation of a CPU, a client performs the following steps after the system is
541 booted:

- 542 1) Select the ManagedSystemElement instance to be tested.
- 543 2) Initialize the property values of DiagnosticSettingData as desired (for example, HaltOnError,
544 LogOptions, etc.).
- 545 3) Select the CPUDiagnosticTest instance that Status test, that is, CPUTestType = 9 (Status).
- 546 4) Invoke the CPUDiagnosticTest.RunDiagnosticService extrinsic method using the instances from
547 Step 1 and 2 as arguments.

548 Repeat Steps 2, 3, and 4 for testing Status, Instructions, and Mixed Instruction Width.

549 **9.5 Full Functional Verification**

550 To more completely verify the proper operation of a CPU, a client performs the following steps after the
551 system is booted:

- 552 1) Select the ManagedSystemElement instance to be tested.
- 553 2) Initialize the property values of DiagnosticSettingData as desired (for example, HaltOnError,
554 LogOptions, etc.).
- 555 3) Select the CPUDiagnosticTest instance that tests the Instruction set, that is, CPUTestType = 3
556 (Instruction).
- 557 4) Invoke the CPUDiagnosticTest.RunDiagnosticService extrinsic method using the instances from
558 Step 1 and 2 as arguments.
- 559 5) Repeat Steps 2, 3, and 4 for testing Status, FPU Instructions, Mixed Instruction Width, Cache,
560 Speed, Voltage, Power Management, and IPC.

561 **9.6 Stress Test**

562 To perform a stress test of a CPU, a client performs the following steps before the system is booted:

- 563 1) Select the ManagedSystemElement instance to be tested.
- 564 2) Set DiagnosticSettingData.LoopControl to 4 (Timer).
- 565 3) Set DiagnosticSettingData.LoopControlParameter to the desired test time duration.
- 566 4) Initialize the other property values of DiagnosticSettingData as desired (for example, HaltOnError,
567 LogOptions, etc.).
- 568 5) Select the CPUDiagnosticTest instance that performs the Stress test, that is, CPUTestType = 13
569 (Stress).
- 570 6) Invoke the CPUDiagnosticTest.RunDiagnosticService extrinsic method using the
571 DiagnosticSettingData instance as an argument.

572 **10 CIM Elements**

573 Table 8 shows the instances of CIM Elements for this profile. Instances of the CIM Elements shall be
574 implemented as described in Table 8. Clause 7 (“Implementation”) and Clause 8 (“Methods”) may impose
575 additional requirements on these elements.

576 **Table 8 – CIM Elements: CPU Diagnostics Profile**

Element Name	Requirement	Description
Classes		
CIM_CPUDiagnosticTest	Mandatory	See 10.1.
CIM_CPUDiagnosticSettingData	Optional	See 10.2.
CIM_CPUDiagnosticServiceCapabilities	Optional	See 10.3.
CIM_RegisteredProfile	Mandatory	See 10.4.
CIM_AffectedJobElement	Optional	See 10.5.
CIM_AvailableDiagnosticService	Mandatory	See 10.6.
CIM_ElementCapabilities	Optional	See 10.7.
CIM_ElementSettingData (DiagnosticSettingData)	Optional	See 10.8.

Element Name	Requirement	Description
CIM_ElementSettingData (JobSettingData)	Optional	See 10.9.
CIM_ElementSoftwareIdentity	Mandatory	See 10.10.
CIM_HostedService	Mandatory	See 10.11.
CIM_OwningJobElement	Mandatory	See 10.12.
CIM_RecordAppliesToElement	Optional	See 10.13.
CIM_ServiceAffectsElement	Mandatory	See 10.14.
CIM_ServiceAvailableToElement	Optional	See 10.15.
CIM_ServiceComponent	Optional	See 10.16.
CIM_UseOfLog	Mandatory	See 10.17.
Indications		
None defined in this profile		

577 10.1 CIM_CPUDiagnosticTest (Specializes CIM_DiagnosticTest)

578 CIM_CPUDiagnosticTest is used to represent the Diagnostic Testing for a CPU. This class specializes
579 CIM_DiagnosticTest as defined in the [Diagnostics Profile](#). The constraints listed in Table 9 are in addition
580 to those specified in the [Diagnostics Profile](#). See the [Diagnostics Profile](#) for other mandatory elements
581 that must be implemented.

582 **Table 9 – Class: CIM_CPUDiagnosticTest**

Elements	Requirement	Notes
ElementName	Mandatory	See 7.2.
Characteristics	Mandatory	See 7.2.
OtherCharacteristicsDescriptions	Conditional	If Characteristics includes the value of 1 (Other), then this property is Mandatory.
CPUTestType	Mandatory	See 7.2.
OtherCPUTestTypeDescription	Conditional	If CPUTestType has a value of 1 (Other), then this property is Mandatory.

583 10.2 CIM_CPUDiagnosticSettingData (Specializes CIM_DiagnosticSettingData)

584 CIM_CPUDiagnosticSettingData is used to pass in test parameters and to specify other test control
585 parameters. This class specializes CIM_DiagnosticSettingData as defined in the [Diagnostics Profile](#). The
586 constraints listed in Table 10 are in addition to those specified in the [Diagnostics Profile](#). See the
587 [Diagnostics Profile](#) for other mandatory elements that must be implemented.

588 **Table 10 – Class: CIM_CPUDiagnosticSettingData**

Elements	Requirement	Notes
ElementName	Mandatory	See 7.3.
CPUSpeeds	Optional	See 7.3.1.
CoreVoltages	Optional	See 7.3.2.

Elements	Requirement	Notes
Seed	Optional	See 7.3.3.

589 **10.3 CIM_CPUDiagnosticServiceCapabilities (Specializes**
 590 **CIM_DiagnosticServiceCapabilities)**

591 CIM_CPUDiagnosticServiceCapabilities is used to provide information on the capabilities for the System
 592 Meory Diagnostic Service. This class specializes CIM_DiagnosticServiceCapabilities as defined in the
 593 [Diagnostics Profile](#). The constraints listed in Table 11 are in addition to those specified in the [Diagnostics](#)
 594 [Profile](#). See the [Diagnostics Profile](#) for other mandatory elements that must be implemented.

595 **Table 11 – Class: CIM_CPUDiagnosticServiceCapabilities**

Elements	Requirement	Notes
ElementName	Mandatory	See 7.4.
CPUSpeeds	Optional	See 7.4.2.
CoreVoltages	Optional	See 7.4.3.
Seed	Optional	See 7.4.4.

596 **10.4 CIM_RegisteredProfile**

597 The CIM_RegisteredProfile class is defined by the [Profile Registration Profile](#). The requirements denoted
 598 in Table 12 are in addition to those mandated by the [Profile Registration Profile](#). See the [Profile](#)
 599 [Registration Profile](#) for the other mandatory elements that must be implemented.

600 **Table 12 – Class: CIM_RegisteredProfile**

Elements	Requirement	Notes
RegisteredName	Mandatory	The value of this property shall be “Optical Disk Diagnostics”.
RegisteredVersion	Mandatory	The value of this property shall be “1.0.1”.
RegisteredOrganization	Mandatory	The value of this property shall be 2 (DMTF).

601 **10.5 CIM_AffectedJobElement**

602 Although defined in the [Diagnostics Profile](#), the CIM_AffectedJobElement class is listed here because the
 603 AffectedElement reference is scoped down to a subclass of CIM_ManagedElement as specified in clause
 604 5. The constraints listed in Table 13 in addition to those specified in the [Diagnostics Profile](#). See the
 605 [Diagnostics Profile](#) for other mandatory properties of CIM_AffectedJobElement that must be
 606 implemented.

607 **Table 13 – Class: CIM_AffectedJobElement**

Properties	Requirement	Notes
AffectedElement (overridden)	Mandatory	The property shall be a reference to an instance of the CIM_ManagedElement subclass specified in clause 5.

Properties	Requirement	Notes
AffectingElement	Mandatory	The property shall be a reference to an instance of CIM_ConcreteJob.

608 10.6 CIM_AvailableDiagnosticService

609 Although defined in the [Diagnostics Profile](#), the CIM_AvailableDiagnosticService class is listed here
 610 because the ServiceProvided reference is scoped down to CIM_CPUDiagnosticTest, which is a subclass
 611 of CIM_DiagnosticTest, and the UserOfService reference is scoped down to a subclass of
 612 CIM_ManagedElement as specified in clause 5. The constraints listed in Table 14 in addition to those
 613 specified in the [Diagnostics Profile](#). See the [Diagnostics Profile](#) for other mandatory properties of
 614 CIM_AvailableDiagnosticService that must be implemented.

615 **Table 14 – Class: CIM_AvailableDiagnosticService**

Properties	Requirement	Notes
ServiceProvided (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticTest.
UserOfService (overridden)	Mandatory	The property shall be a reference to an instance of the CIM_ManagedElement subclass specified in clause5.

616 10.7 CIM_ElementCapabilities

617 Although defined in the [Diagnostics Profile](#), the CIM_ElementCapabilities class is listed here because the
 618 ManagedElement reference is scoped down to CIM_CPUDiagnosticTest, which is a subclass of
 619 CIM_DiagnosticTest, and the Capabilities reference is scoped down to
 620 CIM_CPUDiagnosticServiceCapabilities, which is a subclass of CIM_DiagnosticServiceCapabilities. The
 621 constraints listed in Table 15 in addition to those specified in the [Diagnostics Profile](#). See the [Diagnostics](#)
 622 [Profile](#) for other mandatory properties of CIM_ElementCapabilities that must be implemented.

623 **Table 15 – Class: CIM_ElementCapabilities**

Properties	Requirement	Notes
ManagedElement (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticTest.
Capabilities (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticServiceCapabilities.

624 10.8 CIM_ElementSettingData (DiagnosticSettingData)

625 Although defined in the [Diagnostics Profile](#), the CIM_ElementSettingData class is listed here because the
 626 ManagedElement reference is scoped down to CIM_CPUDiagnosticTest, which is a subclass of
 627 CIM_DiagnosticTest, and the SettingData reference is scoped down to CIM_CPUDiagnosticSettingData,
 628 which is a subclass of CIM_DiagnosticSettingData. The constraints listed in Table 16 in addition to those
 629 specified in the [Diagnostics Profile](#). See the [Diagnostics Profile](#) for other mandatory properties of
 630 CIM_ElementSettingData that must be implemented.

631

Table 16 – Class: CIM_ElementSettingData

Properties	Requirement	Notes
ManagedElement (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticTest.
SettingData (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticSettingData.
IsDefault	Mandatory	If the instance of CIM_CPUDiagnosticSettingData is the default setting, this property shall have the value of TRUE.

632 **10.9 CIM_ElementSettingData (JobSettingData)**

633 Although defined in the [Diagnostics Profile](#), the CIM_ElementSettingData class is listed here because the
 634 Dependent reference is scoped down to CIM_CPUDiagnosticTest, which is a subclass of
 635 CIM_DiagnosticTest, and the SettingData reference is scoped down to CIM_JobSettingData, which is a
 636 subclass of CIM_SettingData. The constraints listed in Table 17 in addition to those specified in the
 637 [Diagnostics Profile](#). See the [Diagnostics Profile](#) for other mandatory properties of
 638 CIM_ElementSettingData that must be implemented.

639

Table 17 – Class: CIM_ElementSettingData

Properties	Requirement	Notes
ManagedElement (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticTest.
SettingData (overridden)	Mandatory	The property shall be a reference to an instance of CIM_JobSettingData.
IsDefault	Mandatory	If the instance of CIM_JobSettingData is the default setting, this property shall have the value of TRUE.

640 **10.10 CIM_ElementSoftwareIdentity**

641 Although defined in the [Diagnostics Profile](#), the CIM_ElementSoftwareIdentity class is listed here because
 642 the Dependent reference is scoped down to CIM_CPUDiagnosticTest, which is a subclass of
 643 CIM_DiagnosticTest. The constraints listed in Table 18 in addition to those specified in the [Diagnostics](#)
 644 [Profile](#). See the [Diagnostics Profile](#) for other mandatory properties of CIM_ElementSoftwareIdentity that
 645 must be implemented.

646

Table 18 – Class: CIM_ElementSoftwareIdentity

Properties	Requirement	Notes
Antecedent	Mandatory	The property shall be a reference to an instance of CIM_SoftwareIdentity.
Dependent (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticTest.

647 **10.11 CIM_HostedService**

648 Although defined in the [Diagnostics Profile](#), the CIM_HostedService class is listed here because the
 649 Dependent reference is scoped down to CIM_CPUDiagnosticTest, which is a subclass of

650 CIM_DiagnosticTest. The constraints listed in Table 19 in addition to those specified in the [Diagnostics Profile](#).
 651 See the [Diagnostics Profile](#) for other mandatory properties of CIM_HostedService that must be
 652 implemented.

653 **Table 19 – Class: CIM_HostedService**

Properties	Requirement	Notes
Antecedent	Mandatory	The property shall be a reference to an instance of CIM_ComputerSystem.
Dependent (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticTest.

654 10.12 CIM_OwningJobElement

655 Although defined in the [Diagnostics Profile](#), the CIM_OwningJobElement class is listed here because the
 656 OwningElement reference is scoped down to CIM_CPUDiagnosticTest, which is a subclass of
 657 CIM_DiagnosticTest. The constraints listed in Table 20 in addition to those specified in the [Diagnostics Profile](#).
 658 See the [Diagnostics Profile](#) for other mandatory properties of CIM_OwningJobElement that must
 659 be implemented.

660 **Table 20 – Class: CIM_OwningJobElement**

Properties	Requirement	Notes
OwningElement (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticTest.
OwnedElement	Mandatory	The property shall be a reference to an instance of CIM_ConcreteJob.

661 10.13 CIM_RecordAppliesToElement

662 Although defined in the [Diagnostics Profile](#), the CIM_RecordAppliesToElement class is listed here
 663 because the Dependent reference is scoped down to CIM_CPUDiagnosticTest, which is a subclass of
 664 CIM_DiagnosticTest. The constraints listed in Table 21 in addition to those specified in the [Diagnostics Profile](#).
 665 See the [Diagnostics Profile](#) for other mandatory properties of CIM_RecordAppliesToElement that
 666 must be implemented.

667 **Table 21 – Class: CIM_RecordAppliesToElement**

Properties	Requirement	Notes
Antecedent	Mandatory	The property shall be a reference to an instance of CIM_RecordForLog.
Dependent (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticTest.

668 10.14 CIM_ServiceAffectsElement

669 Although defined in the [Diagnostics Profile](#), the CIM_ServiceAffectsElement class is listed here because
 670 the AffectedElement reference is scoped down to a subclass of CIM_ManagedElement as specified in
 671 clause 5, and the AffectingElement reference is scoped down to CIM_CPUDiagnosticTest, which is a
 672 subclass of CIM_DiagnosticTest. The constraints listed in Table 22 in addition to those specified in the
 673 [Diagnostics Profile](#). See the [Diagnostics Profile](#) for other mandatory properties of
 674 CIM_ServiceAffectsElement that must be implemented.

675

Table 22 – Class: CIM_ServiceAffectsElement

Properties	Requirement	Notes
AffectedElement (overridden)	Mandatory	The property shall be a reference to an instance of the CIM_ManagedElement subclass specified in clause 5.
AffectingElement (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticTest.

676 **10.15 CIM_ServiceAvailableToElement**

677 Although defined in the [Diagnostics Profile](#), the CIM_ServiceAvailableToElement class is listed here
 678 because the UsersOfService reference is scoped down to CIM_CPUDiagnosticTest, which is a subclass
 679 of CIM_DiagnosticTest. The constraints listed in Table 23 in addition to those specified in the [Diagnostics](#)
 680 [Profile](#). See the [Diagnostics Profile](#) for other mandatory properties of CIM_ServiceAvailableToElement
 681 that must be implemented.

682

Table 23 – Class: CIM_ServiceAvailableToElement

Properties	Requirement	Notes
ServiceProvided	Mandatory	The property shall be a reference to an instance of CIM_HelpService.
UsersOfService (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticTest.

683 **10.16 CIM_ServiceComponent**

684 Although defined in the [Diagnostics Profile](#), the CIM_ServiceComponent class is listed here because the
 685 GroupComponent reference is scoped down to CIM_CPUDiagnosticTest, which is a subclass of
 686 CIM_DiagnosticTest, and the PartComponent reference is scoped down to CIM_CPUDiagnosticTest,
 687 which is a subclass of CIM_DiagnosticTest. The constraints listed in Table 24 in addition to those
 688 specified in the [Diagnostics Profile](#). See the [Diagnostics Profile](#) for other mandatory properties of
 689 CIM_ServiceComponent that must be implemented.

690

Table 24 – Class: CIM_ServiceComponent

Properties	Requirement	Notes
GroupComponent (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticTest.
PartComponent (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticTest.

691 **10.17 CIM_UseOfLog**

692 Although defined in the [Diagnostics Profile](#), the CIM_UseOfLog class is listed here because the
 693 Dependent reference is scoped down to CIM_CPUDiagnosticTest, which is a subclass of
 694 CIM_DiagnosticTest. The constraints listed in Table 25 in addition to those specified in the [Diagnostics](#)
 695 [Profile](#). See the [Diagnostics Profile](#) for other mandatory properties of CIM_UseOfLog that must be
 696 implemented.

697

Table 25 – Class: CIM_UseOfLog

Properties	Requirement	Notes
Antecedent	Mandatory	The property shall be a reference to an instance of CIM_DiagnosticLog.
Dependent (overridden)	Mandatory	The property shall be a reference to an instance of CIM_CPUDiagnosticTest.

698
699
700
701

Annex A (informative)

Change Log

Version	Date	Description
1.0.0	2011-06-30	DMTF Standard
1.0.1	2011-10-26	DMTF Standard

702