



1

2

3

4

Document Number: DSP1011

Date: 2008-01-29

Version: 1.0.0

5 **Physical Asset Profile**

6 **Document Type: Specification**

7 **Document Status: Final Standard**

8 **Document Language: E**

9 Copyright Notice

10 Copyright © 2008 Distributed Management Task Force, Inc. (DMTF). All rights reserved.

11 DMTF is a not-for-profit association of industry members dedicated to promoting enterprise and systems
12 management and interoperability. Members and non-members may reproduce DMTF specifications and
13 documents for uses consistent with this purpose, provided that correct attribution is given. As DMTF
14 specifications may be revised from time to time, the particular version and release date should always be
15 noted.

16 Implementation of certain elements of this standard or proposed standard may be subject to third party
17 patent rights, including provisional patent rights (herein "patent rights"). DMTF makes no representations
18 to users of the standard as to the existence of such rights, and is not responsible to recognize, disclose,
19 or identify any or all such third party patent right, owners or claimants, nor for any incomplete or
20 inaccurate identification or disclosure of such rights, owners or claimants. DMTF shall have no liability to
21 any party, in any manner or circumstance, under any legal theory whatsoever, for failure to recognize,
22 disclose, or identify any such third party patent rights, or for such party's reliance on the standard or
23 incorporation thereof in its product, protocols or testing procedures. DMTF shall have no liability to any
24 party implementing such standard, whether such implementation is foreseeable or not, nor to any patent
25 owner or claimant, and shall have no liability or responsibility for costs or losses incurred if a standard is
26 withdrawn or modified after publication, and shall be indemnified and held harmless by any party
27 implementing the standard from any and all claims of infringement by a patent owner for such
28 implementations.

CONTENTS

30	Foreword	6
31	Introduction	7
32	1 Scope	9
33	2 Normative References.....	9
34	2.1 Approved References	9
35	2.2 Other References.....	9
36	3 Terms and Definitions	9
37	4 Symbols and Abbreviated Terms.....	11
38	5 Synopsis.....	11
39	6 Description	13
40	7 Implementation.....	14
41	7.1 Physical Element	15
42	7.2 Finding the Scoping Instance of the CIM_System or CIM_ComputerSystem class	15
43	7.3 Modeling the Physical Aspects of Logical Representation of Devices	16
44	7.4 Support for the Physical Element's FRU Information	16
45	7.5 Compatibility of Physical Packages	16
46	7.6 Modeling System Chassis	17
47	7.7 Modeling Configuration Capacity.....	17
48	7.8 Modeling Physical Hierarchy	17
49	8 Methods.....	17
50	8.1 Profile Conventions for Operations.....	18
51	8.2 CIM_Card.....	18
52	8.3 CIM_Chassis.....	18
53	8.4 CIM_Chip.....	18
54	8.5 CIM_ComputerSystemPackage	18
55	8.6 CIM_ConfigurationCapacity	19
56	8.7 CIM_ConnectedTo.....	19
57	8.8 CIM_Container.....	19
58	8.9 CIM_ElementCapabilities	19
59	8.10 CIM_ElementCapacity	20
60	8.11 CIM_ElementInConnector	20
61	8.12 CIM_PhysicalAssetCapabilities	20
62	8.13 CIM_PhysicalComponent	20
63	8.14 CIM_PhysicalConnector	21
64	8.15 CIM_PhysicalFrame.....	21
65	8.16 CIM_PhysicalMemory	21
66	8.17 CIM_PhysicalPackage	21
67	8.18 CIM_Rack	21
68	8.19 CIM_Realizes.....	21
69	8.20 CIM_Slot	21
70	8.21 CIM_SystemPackaging.....	21
71	9 Use Cases.....	22
72	9.1 System Chassis FRU Information.....	22
73	9.2 Fan Package FRU Information	23
74	9.3 Finding the Scoping Instance for a Fan Package.....	24
75	9.4 Physical Topology and Finding the Scoping Instance	24
76	9.5 Physical Topology.....	26
77	9.6 Physical Memory.....	27
78	9.7 Representing Configuration Capacity	28
79	9.8 Representing Physical Connector	30
80	9.9 Determining the Part Number of a Failing Component.....	30
81	9.10 Obtaining the Physical Inventory for All Devices within a System.....	30

Physical Asset Profile

82	9.11	Obtaining the Physical Inventory for a System Chassis	31
83	9.12	Determining Whether the Slot Is Empty.....	31
84	9.13	Retrieving the Fan Capacity for the Chassis	31
85	9.14	Retrieving the Maximum Capacity of the Type of Fan Package within the Chassis	31
86	10	CIM Elements	31
87	10.1	CIM_Card.....	33
88	10.2	CIM_Chassis.....	34
89	10.3	CIM_Chip	34
90	10.4	CIM_ComputerSystemPackage	35
91	10.5	CIM_ConfigurationCapacity	35
92	10.6	CIM_ConnectedTo.....	35
93	10.7	CIM_Container.....	36
94	10.8	CIM_ElementCapabilities	36
95	10.9	CIM_ElementCapacity	36
96	10.10	CIM_ElementInConnector	37
97	10.11	CIM_PhysicalAssetCapabilities	37
98	10.12	CIM_PhysicalComponent	37
99	10.13	CIM_PhysicalConnector	38
100	10.14	CIM_PhysicalFrame.....	38
101	10.15	CIM_PhysicalMemory	39
102	10.16	CIM_PhysicalPackage	39
103	10.17	CIM_Rack	40
104	10.18	CIM_Realizes.....	40
105	10.19	CIM_RegisteredProfile.....	40
106	10.20	CIM_Slot	41
107	10.21	CIM_SystemPackaging.....	41
108	ANNEX A (informative)	Change Log.....	42
109	ANNEX B (informative)	Acknowledgments.....	43

110

111 Figures

112	Figure 1 – Physical Asset Profile: Profile Class Diagram	14
113	Figure 2 – System Chassis Object Diagram	22
114	Figure 3 – CIM_PhysicalPackage Object Diagram.....	23
115	Figure 4 – Scoping Instance: Logical Device Object Diagram.....	24
116	Figure 5 – Scoping Instance: Physical Topology Object Diagram.....	25
117	Figure 6 – Physical Asset Profile: Topology Object Diagram	26
118	Figure 7 – Physical Memory Topology Object Diagram	27
119	Figure 8 –Configuration Capacity Object Diagram	28
120	Figure 9 – Additional Configuration Capacity Object Diagram	29
121	Figure 10 –Network Port Connector Object Diagram	30

122

123 **Tables**

124	Table 1 – Referenced Profiles	11
125	Table 2 – Operations: CIM_ComputerSystemPackage.....	18
126	Table 3 – Operations: CIM_ConnectedTo	19
127	Table 4 – Operations: CIM_Container	19
128	Table 5 – Operations: CIM_ElementCapabilities	19
129	Table 6 – Operations: CIM_ElementCapacity.....	20
130	Table 7 – Operations: CIM_ElementInConnector	20
131	Table 8 – Operations: CIM_Realizes	21
132	Table 9 – Operations: CIM_SystemPackaging.....	21
133	Table 10 – CIM Elements: Physical Asset Profile.....	32
134	Table 11 – Class: CIM_Card.....	33
135	Table 12 – Class: CIM_Chassis.....	34
136	Table 13 – Class: CIM_Chip	34
137	Table 14 – Class: CIM_ComputerSystemPackage	35
138	Table 15 – Class: CIM_ConfigurationCapacity	35
139	Table 16 – Class: CIM_ConnectedTo.....	35
140	Table 17 – Class: CIM_Container.....	36
141	Table 18 – Class: CIM_ElementCapabilities.....	36
142	Table 19 – Class: CIM_ElementCapacity	36
143	Table 20 – Class: CIM_ElementInConnector.....	37
144	Table 21 – Class: CIM_PhysicalAssetCapabilities	37
145	Table 22 – Class: CIM_PhysicalComponent	37
146	Table 23 – Class: CIM_PhysicalConnector	38
147	Table 24 – Class: CIM_PhysicalFrame.....	38
148	Table 25 – Class: CIM_PhysicalMemory	39
149	Table 26 – Class: CIM_PhysicalPackage	39
150	Table 27 – Class: CIM_Rack	40
151	Table 28 – Class: CIM_Realizes.....	40
152	Table 29 – Class: CIM_RegisteredProfile.....	40
153	Table 30 – Class: CIM_Slot	41
154	Table 31 – Class: CIM_SystemPackaging.....	41

155

Foreword

156 The *Physical Asset Profile* (DSP1011) was prepared by the Server Management Working Group.

157 DMTF is a not-for-profit association of industry members dedicated to promoting enterprise and systems
158 management and interoperability.

159

Introduction

160 This document describes the physical aspects of the logical elements that the implementation is
161 instantiating. Physical aspects include asset, inventory, and other descriptive physical information. Also
162 included are descriptions of association classes that describe the relationship of physical elements and
163 DMTF profile registration information. The information in this specification should be sufficient for a
164 provider or consumer of this data to identify unambiguously the classes, properties, methods, and values
165 that must be instantiated and manipulated to represent and manage classes representing physical
166 elements of systems and subsystems modeled using the DMTF CIM core and extended model
167 definitions.

168 The target audience for this specification is implementers who are writing CIM-based providers or
169 consumers of management interfaces representing the component described in this document.

170

Physical Asset Profile

171 1 Scope

172 The *Physical Asset Profile* extends the management capability of the referencing profiles by adding the
 173 capability to describe the physical aspects of logical elements that the implementation is instantiating. The
 174 profile also describes the relationship between the physical elements and the profile's registration for the
 175 schema implementation and version information.

176 2 Normative References

177 The following referenced documents are indispensable for the application of this document. For dated
 178 references, only the edition cited applies. For undated references, the latest edition of the referenced
 179 document (including any amendments) applies.

180 2.1 Approved References

181 DMTF [DSP0200](#), *CIM Operations over HTTP 1.2.0*

182 DMTF [DSP0004](#), *CIM Infrastructure Specification 2.3.0*

183 DMTF [DSP1000](#), *Management Profile Specification Template 1.0.0*

184 DMTF [DSP1001](#), *Management Profile Specification Usage Guide 1.0.0*

185 DMTF [DSP1033](#), *Profile Registration Profile 1.0.0*

186 2.2 Other References

187 ISO/IEC Directives, Part 2, *Rules for the structure and drafting of International Standards*,
 188 <http://isotc.iso.org/livelink/livelink.exe?func=ll&objId=4230456&objAction=browse&sort=subtype>

189 UML Specifications, http://www.omg.org/technology/documents/modeling_spec_catalog.htm#UML

190 *Unified Modeling Language (UML) from the Open Management Group (OMG)*, <http://www.omg.org/uml/>

191 3 Terms and Definitions

192 For the purposes of this document, the following terms and definitions apply. For the purposes of this
 193 document, the terms and definitions in [DSP1033](#) and [DSP1001](#) also apply.

194 3.1

195 can

196 used for statements of possibility and capability, whether material, physical, or causal

197 3.2

198 cannot

199 used for statements of possibility and capability, whether material, physical, or causal

200 3.3

201 conditional

202 indicates requirements to be followed strictly in order to conform to the document when the specified
 203 conditions are met

- 204 **3.4**
205 **mandatory**
206 indicates requirements to be followed strictly in order to conform to the document and from which no
207 deviation is permitted
- 208 **3.5**
209 **may**
210 indicates a course of action permissible within the limits of the document
- 211 **3.6**
212 **need not**
213 indicates a course of action permissible within the limits of the document
- 214 **3.7**
215 **optional**
216 indicates a course of action permissible within the limits of the document
- 217 **3.8**
218 **referencing profile**
219 indicates a profile that owns the definition of this class and can include a reference to this profile in its
220 "Referenced Profiles" table
- 221 **3.9**
222 **shall**
223 indicates requirements to be followed strictly in order to conform to the document and from which no
224 deviation is permitted
- 225 **3.10**
226 **shall not**
227 indicates requirements to be followed in order to conform to the document and from which no deviation is
228 permitted
- 229 **3.11**
230 **should**
231 indicates that among several possibilities, one is recommended as particularly suitable, without
232 mentioning or excluding others, or that a certain course of action is preferred but not necessarily required
- 233 **3.12**
234 **should not**
235 indicates that a certain possibility or course of action is deprecated but not prohibited
- 236 **3.13**
237 **unspecified**
238 indicates that this profile does not define any constraints for the referenced CIM element or operation
- 239 **3.14**
240 **Delimited Substring**
241 a substring element of the VendorCompatibilityStrings property of a Physical Element or an instance of
242 CIM_ConfigurationCapacity. The substring starts at the beginning of the string (representing an element
243 in the array of the VendorCompatibilityStrings property) and terminates at the end of the string, or at a
244 character that precedes a colon (:).

245 **3.15**246 **Physical Element**

247 an instance of a CIM_PhysicalElement subclass (such as CIM_PhysicalConnector, CIM_Slot,
248 CIM_PhysicalComponent, CIM_Chip, CIM_PhysicalMemory, CIM_PhysicalPackage,
249 CIM_PhysicalFrame, CIM_Chassis, CIM_Rack, and CIM_Card) that represents a physical element

250 **3.16**251 **Physical Package**

252 an instance of a CIM_PhysicalPackage or CIM_PhysicalPackage subclass (such as CIM_PhysicalFrame,
253 CIM_Chassis, CIM_Rack, and CIM_Card) or CIM_PhysicalComponent or CIM_PhysicalComponent
254 subclass (such as CIM_Chip or CIM_PhysicalMemory) that represents a package

255 **3.17**256 **System Chassis**

257 an instance of the CIM_PhysicalElement or CIM_Chassis that is associated to an instance of
258 CIM_System or CIM_ComputerSystem through the CIM_SystemPackaging or
259 CIM_ComputerSystemPackage association, representing the physical package of the managed system.

260 **4 Symbols and Abbreviated Terms**261 **4.1**262 **CIM**

263 Common Information Model

264 **4.2**265 **FRU**

266 Field Replaceable Unit

267 **5 Synopsis**

268 **Profile Name:** *Physical Asset*

269 **Version:** 1.0.0

270 **Organization:** DMTF

271 **CIM Schema version:** 2.18.0

272 **Central Class:** CIM_PhysicalElement

273 **Scoping Class:** CIM_ManagedSystemElement

274 The *Physical Asset Profile* extends the management capability of the referencing profiles by adding the
275 capability to describe the physical aspects of the logical elements that the implementation is instantiating.
276 Physical aspects include asset, inventory, and other descriptive physical information.

277

Table 1 – Referenced Profiles

Profile Name	Organization	Version	Relationship	Behavior
<i>Profile Registration</i>	DMTF	1.0.0	Mandatory	

278 The Central Instance for the *Physical Asset Profile* shall be the instance of the CIM_PhysicalElement
279 subclass.

280 The Scoping Instance for the *Physical Asset Profile* shall be the instance of the
281 CIM_ManagedSystemElement. Note that this may include the subclass of CIM_System, the

Physical Asset Profile

282 CIM_ComputerSystem class. The Scoping Instance is determined using the algorithm described in
283 section 7.2.

284 **6 Description**

285 The *Physical Asset Profile* describes the necessary elements needed to provide the descriptive and asset
286 information about the physical components in a managed domain and their topology. The profile does not
287 cover the geographic location of the physical assets.


288 Figure 1 shows the CIM classes that are used in this profile. (For simplicity, the prefix CIM_ has been
289 removed from the names of the classes.) A Physical Element (see section 3.15) describes the physical
290 properties, including the FRU information, of a managed element. The capabilities of the Physical
291 Elements are described by the properties of the CIM_PhysicalAssetCapabilities class. The Physical
292 Elements could be associated to the logical representation of the managed element through the
293 CIM_Realizes association. The enclosures or chassis of the managed systems are represented by a
294 CIM_PhysicalElement or CIM_Chassis instance that is associated to the
295 CIM_System/CIM_ComputerSystem instance through the
296 CIM_SystemPackaging/CIM_ComputerSystemPackage association and are referred to as a System
297 Chassis (see section 3.17). Configuration capacity of the System Chassis is also represented within this
298 profile by CIM_ConfigurationCapacity instances.

299 Physical Elements can be also arranged in a topology. The CIM_Container, CIM_ConnectedTo, and
300 CIM_ElementInConnector associations are used to associate the Physical Elements and create the
301 physical topology of the managed elements.

302 Figure 1 also represents the ecosystem of *Physical Asset Profile* classes, illustrating their relationship
303 with classes of referencing profiles. The referencing profiles can identify the subclass of
304 CIM_PhysicalElement to be used for representing the physical aspects of the managed element. For
305 example, the referencing profiles that contain a CIM_LogicalDevice subclass can restrict the associated
306 subclass of CIM_PhysicalPackage to CIM_PhysicalMemory for instantiation of the *Physical Asset Profile*.
307 Such restrictions will be described in the referencing profiles.

308 The *Physical Asset Profile* is advertised through the CIM_RegisteredProfile instance.

Physical Asset Profile

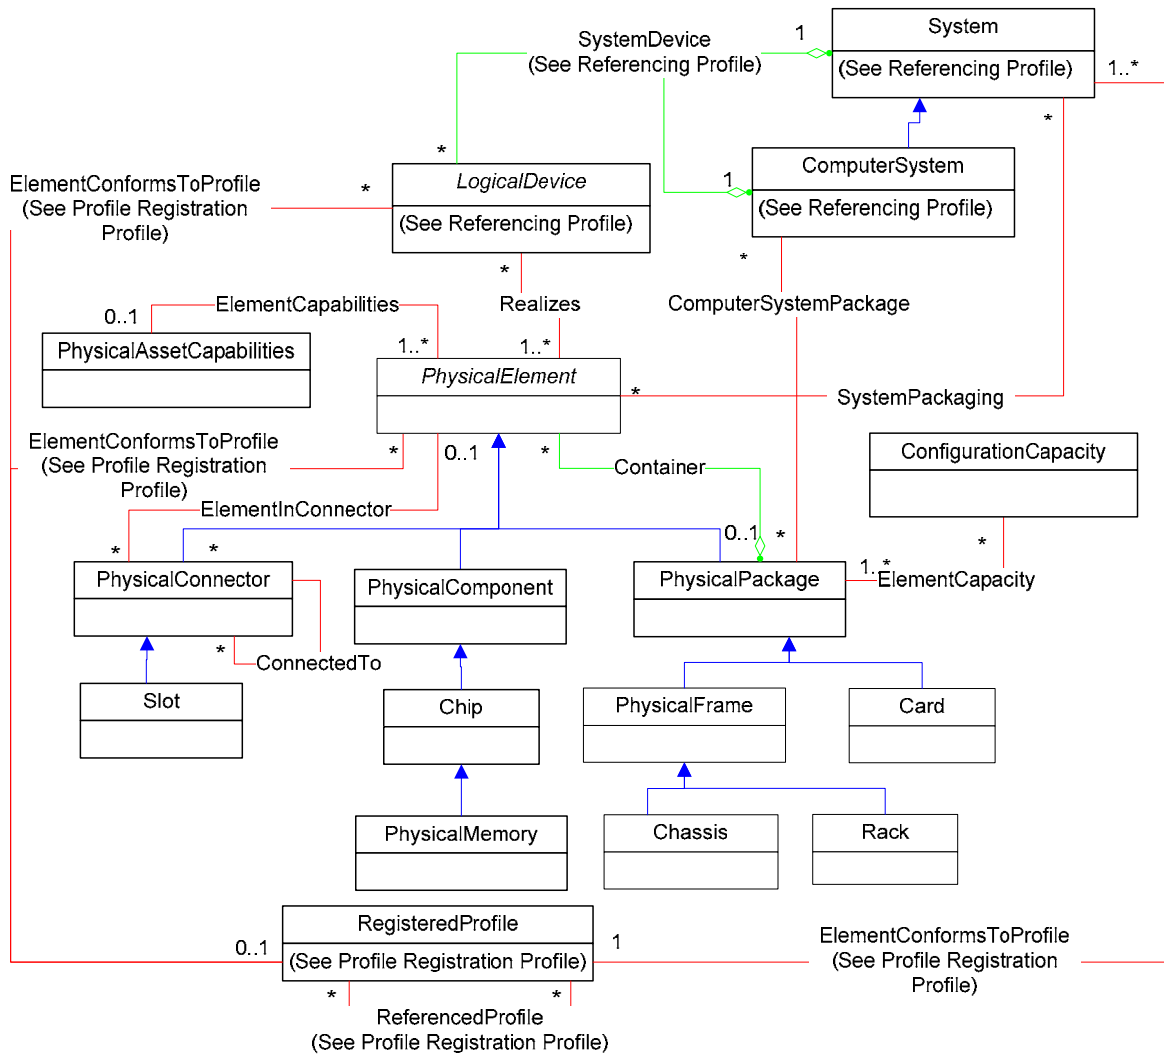

309

310

Figure 1 – Physical Asset Profile: Profile Class Diagram

311 The *Physical Asset Profile* can be instantiated to represent a combination of the following scenarios:

- 312 • the physical aspects of a managed system, such as the FRU information for the chassis (see
313 section 7.6)
- 314 • the physical aspects of a specific managed element, such as the FRU information of a fan (see
315 section 7.3)
- 316 • the physical hierarchy of a managed system, such as the relationship between chassis, slots, and
317 packages (see section 7.8)
- 318 • the configuration capacity of a managed element, such as the minimum and maximum number of
319 certain types of packages that the managed system can handle (see section 7.7)

320 7 Implementation

321 This section details the requirements related to the arrangement of instances and their properties for
322 implementations of this profile.

323 7.1 Physical Element

324 The implementation shall instantiate at least one instance of the subclass of CIM_PhysicalElement
 325 (Physical Element). Referencing profiles may state the subclass of CIM_PhysicalElement that is to be
 326 instantiated as part of the *Physical Asset Profile*.

327 At least one instance of CIM_Realizes, CIM_ComputerSystemPackage, or CIM_SystemPackaging
 328 association class shall reference an instance of a subclass of CIM_PhysicalElement (Physical Element).

329 Every Physical Element shall be referenced by at least one of the following properties:
 330 CIM_ComputerSystemPackage.Antecedent, CIM_SystemPackaging.Antecedent,
 331 CIM_Realizes.Antecedent, CIM_Container.PartComponent, or CIM_ElementInConnector.Dependent.

332 7.2 Finding the Scoping Instance of the CIM_System or CIM_ComputerSystem 333 class

334 The following algorithm shall be used for locating the Scoping Instance of the CIM_System or
 335 CIM_ComputerSystem class starting from any selected Physical Element.

336 I. If the selected instance is of a Physical Package, proceed as follows:

337 A. If the Physical Package is associated to the CIM_LogicalDevice through the CIM_Realizes
 338 association or to the CIM_System/CIM_ComputerSystem through the
 339 CIM_SystemPackaging/CIM_ComputerSystemPackage association, the Scoping Instance of
 340 the *Physical Asset Profile* shall be either of the following:

- 341 a. the Scoping Instance of the CIM_LogicalDevice instance that is associated to the
 342 Physical Package through the instance of CIM_Realizes
- 343 b. the Scoping Instance of CIM_System/CIM_ComputerSystem instance that is
 344 associated to the Physical Package through the instance of CIM_SystemPackaging or
 345 CIM_ComputerSystemPackage

346

347 B. If the Physical Package is not associated to the CIM_LogicalDevice through the CIM_Realizes
 348 association or to the CIM_System or CIM_ComputerSystem through the
 349 CIM_SystemPackaging or CIM_ComputerSystemPackage association, proceed as follows:

350 1. If the Physical Package is the Dependent or PartComponent reference in
 351 CIM_ElementInConnector or CIM_Container associations, respectively, choose one of the
 352 following paths:

353 a. If the Antecedent or GroupComponent reference of the association is a Physical
 354 Package, select the Antecedent or GroupComponent referenced instance, and go to
 355 I.A.

356 b. Else if the Antecedent or GroupComponent reference of the association is a Physical
 357 Element:

358 (1) If the Physical Element is associated to the CIM_LogicalDevice through the
 359 CIM_Realizes association, the Scoping Instance of the *Physical Asset Profile*
 360 shall be the Scoping Instance of the CIM_LogicalDevice instance.

361 (2) If the Physical Element instance is not associated to the CIM_LogicalDevice
 362 through the CIM_Realizes association:

363 (a) If the Physical Element is the PartComponent reference in the
 364 CIM_Container association:

365 1) If a Physical Package is the GroupComponent reference for the
 366 CIM_Container association, select the GroupComponent referenced
 367 instance, and go to I.A.

408 The VendorCompatibilityStrings property of a Physical Package and an instance of CIM_Slot shall be an
 409 array of strings, each uniquely identifying the specific type of package and matching a “:” character-free,
 410 non-zero length string, delimited by “:” character (pattern “[^:]+(:[^\:]+)”).

411 Only if the physical package represented by the Physical Package can be inserted into the slot
 412 represented by the instance of CIM_Slot, the VendorCompatibilityStrings property of Physical Package
 413 shall contain an element with a Delimited Substring equal to a string of one of the elements from the
 414 VendorCompatibilityStrings property of an instance of CIM_Slot.

415 **7.6 Modeling System Chassis**

416 The implementation may instantiate a System Chassis. When a System Chassis is instantiated, the
 417 System Chassis shall be associated with the instance of CIM_System through the instance of
 418 CIM_SystemPackaging, or with the instance of CIM_ComputerSystem through the instance of
 419 CIM_ComputerSystemPackage.

420 **7.7 Modeling Configuration Capacity**

421 The implementation may advertise the configuration capacity of the physical packages within the chassis,
 422 including the chassis itself. The configuration capacity shall be represented through the
 423 CIM_ConfigurationCapacity instances.

424 When a System Chassis is present, the instrumentation shall associate all the instances of
 425 CIM_ConfigurationCapacity to the System Chassis through the instances of CIM_ElementCapacity.
 426 Additionally, when the configuration capacity is for a particular physical package represented by a
 427 Physical Package, the instrumentation may associate the Physical Package with the
 428 CIM_ConfigurationCapacity through an instance of CIM_ElementCapacity.

429 When instances of CIM Slot are instantiated, for each unique value of the
 430 CIM_Slot.VendorCompatibilityStrings, an instance of CIM_ConfigurationCapacity with an equal value for
 431 the CIM_ConfigurationCapacity.VendorCompatibilityStrings property shall exist. Additional instances of
 432 CIM_ConfigurationCapacity may exist.

433 When CIM_Slot instances are not instantiated or the CIM_Slot.VendorCompatibilityStrings property is not
 434 instrumented, the CIM_ConfigurationCapacityVendorCompatibilityStrings array property shall contain an
 435 element with a Delimited Substring that is equal to a string of one of the elements from the
 436 VendorCompatibilityStrings array property of a Physical Package that can be part of the configuration.

437 **7.8 Modeling Physical Hierarchy**

438 The physical hierarchy is represented by relationship and containment of Physical Elements. The
 439 implementation may represent the physical hierarchy as follows:

- 440 • When a physical element resides within a package, the Physical Element shall be associated with
 441 the Physical Package through the CIM_Container association.
- 442 • When a package is plugged or connected to a slot or connector, the Physical Package shall be
 443 associated with the CIM_PhysicalConnector or CIM_Slot instance through the
 444 CIM_ElementInConnector association.
- 445 • When physical connectors or slots are connected, the CIM_PhysicalConnector or CIM_Slot
 446 instances shall be associated through the CIM_ConnectedTo association.

447 **8 Methods**

448 This section details the requirements for supporting intrinsic operations for the CIM elements defined by
 449 this profile. The *Physical Asset Profile* does not define any extrinsic methods.

450 8.1 Profile Conventions for Operations

451 Support for operations for each profile class (including associations) is specified in the following
 452 subclauses. Each of these subclauses includes either a the statement “All operations in the default list in
 453 section 8.1 are supported as described by [DSP0200 version 1.2](#)” or a table listing all of the operations
 454 that are not supported by this profile or where the profile requires behavior other than that described by
 455 [DSP0200 version 1.2](#).

456 The default list of operations is as follows:

- 457 • GetInstance
- 458 • Associators
- 459 • AssociatorNames
- 460 • References
- 461 • ReferenceNames
- 462 • EnumerateInstances
- 463 • EnumerateInstanceNames

464 A compliant implementation shall support all of the operations in the default list for each class, unless the
 465 “Requirement” column states something other than *Mandatory*.

466 8.2 CIM_Card

467 All operations in the default list in section 8.1 are supported as described by [DSP0200 version 1.2](#).

468 8.3 CIM_Chassis

469 All operations in the default list in section 8.1 are supported as described by [DSP0200 version 1.2](#).

470 8.4 CIM_Chip

471 All operations in the default list in section 8.1 are supported as described by [DSP0200 version 1.2](#).

472 8.5 CIM_ComputerSystemPackage

473 Table 2 lists operations that either have special requirements beyond those from [DSP0200 version 1.2](#) or
 474 shall not be supported.

475 **Table 2 – Operations: CIM_ComputerSystemPackage**

Operation	Requirement	Messages
EnumerateInstanceNames	Unspecified	None
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

476 8.6 CIM_ConfigurationCapacity

477 All operations in the default list in section 8.1 are supported as described by [DSP0200 version 1.2](#).

478 8.7 CIM_ConnectedTo

479 Table 3 lists operations that either have special requirements beyond those from [DSP0200 version 1.2](#) or
480 shall not be supported.

481 **Table 3 – Operations: CIM_ConnectedTo**

Operation	Requirement	Messages
EnumerateInstanceNames	Unspecified	None
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

482 8.8 CIM_Container

483 Table 4 lists operations that either have special requirements beyond those from [DSP0200 version 1.2](#) or
484 shall not be supported.

485 **Table 4 – Operations: CIM_Container**

Operation	Requirement	Messages
EnumerateInstanceNames	Unspecified	None
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

486 8.9 CIM_ElementCapabilities

487 Table 5 lists operations that either have special requirements beyond those from [DSP0200 version 1.2](#) or
488 shall not be supported.

489 **Table 5 – Operations: CIM_ElementCapabilities**

Operation	Requirement	Messages
EnumerateInstanceNames	Unspecified	None
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

490 **8.10 CIM_ElementCapacity**

491 Table 6 lists operations that either have special requirements beyond those from [DSP0200 version 1.2](#) or
 492 shall not be supported.

493 **Table 6 – Operations: CIM_ElementCapacity**

Operation	Requirement	Messages
EnumerateInstanceNames	Unspecified	None
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

494 **8.11 CIM_ElementInConnector**

495 Table 7 lists operations that either have special requirements beyond those from [DSP0200 version 1.2](#) or
 496 shall not be supported.

497 **Table 7 – Operations: CIM_ElementInConnector**

Operation	Requirement	Messages
EnumerateInstanceNames	Unspecified	None
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

498 **8.12 CIM_PhysicalAssetCapabilities**

499 All operations in the default list in section 8.1 are supported as described by [DSP0200 version 1.2](#).

500 **8.13 CIM_PhysicalComponent**

501 All operations in the default list in section 8.1 are supported as described by [DSP0200 version 1.2](#).

502 8.14 CIM_PhysicalConnector

503 All operations in the default list in section 8.1 are supported as described by [DSP0200 version 1.2](#).

504 8.15 CIM_PhysicalFrame

505 All operations in the default list in section 8.1 are supported as described by [DSP0200 version 1.2](#).

506 8.16 CIM_PhysicalMemory

507 All operations in the default list in section 8.1 are supported as described by [DSP0200 version 1.2](#).

508 8.17 CIM_PhysicalPackage

509 All operations in the default list in section 8.1 are supported as described by [DSP0200 version 1.2](#).

510 8.18 CIM_Rack

511 All operations in the default list in section 8.1 are supported as described by [DSP0200 version 1.2](#).

512 8.19 CIM_Realizes

513 Table 8 lists operations that either have special requirements beyond those from [DSP0200 version 1.2](#) or
514 shall not be supported.

515 **Table 8 – Operations: CIM_Realizes**

Operation	Requirement	Messages
EnumerateInstanceNames	Unspecified	None
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

516 8.20 CIM_Slot

517 All operations in the default list in section 8.1 are supported as described by [DSP0200 version 1.2](#).

518 8.21 CIM_SystemPackaging

519 Table 9 lists operations that either have special requirements beyond those from [DSP0200 version 1.2](#) or
520 shall not be supported.

521 **Table 9 – Operations: CIM_SystemPackaging**


Operation	Requirement	Messages
EnumerateInstanceNames	Unspecified	None
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

522

523 **9 Use Cases**

524 **9.1 System Chassis FRU Information**

525 Figure 2 represents a possible instantiation of the *Physical Asset Profile*. In this case, the physical
 526 aspects of the instance of CIM_ComputerSystem are represented by an instance of CIM_Chassis
 527 through a CIM_ComputerSystemPackage association. The Tag property of Chassis1 represents the
 528 asset tag of the chassis. The TRUE value of the FRUInfo property of capabilities1 indicates that chassis1
 529 contains non-zero, non-blank properties describing FRU information such as PartNumber, SerialNumber,
 530 Model, and Manufacturer. (See section 7.4 for more details.) Profile2 advertises the implemented
 531 *Physical Asset Profile* information.

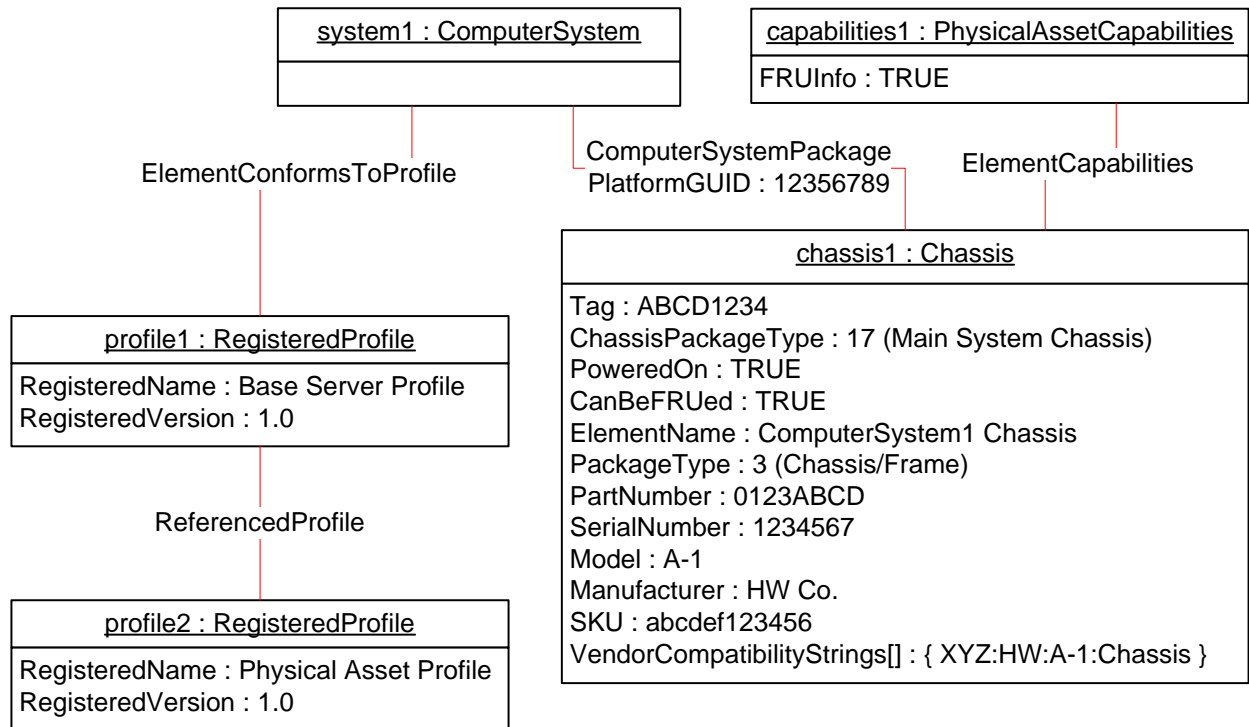


532

533

Figure 2 – System Chassis Object Diagram

534 **9.2 Fan Package FRU Information**

535 Figure 3 represents another possible instantiation of the *Physical Asset Profile*. The instance of
 536 CIM_PhysicalPackage represents the physical properties of the given instance of CIM_Fan through a
 537 CIM_Realizes association. The CIM_PhysicalPackage.Tag property represents the asset tag of the fan1.
 538 The TRUE value of the FRUInfo property of capabilities1 indicates that physicalpackage1 contains non-
 539 zero, non-blank properties describing FRU information such as PartNumber, SerialNumber, Model,
 540 Manufacturer, and SKU. (See section 7.4 for more details.)

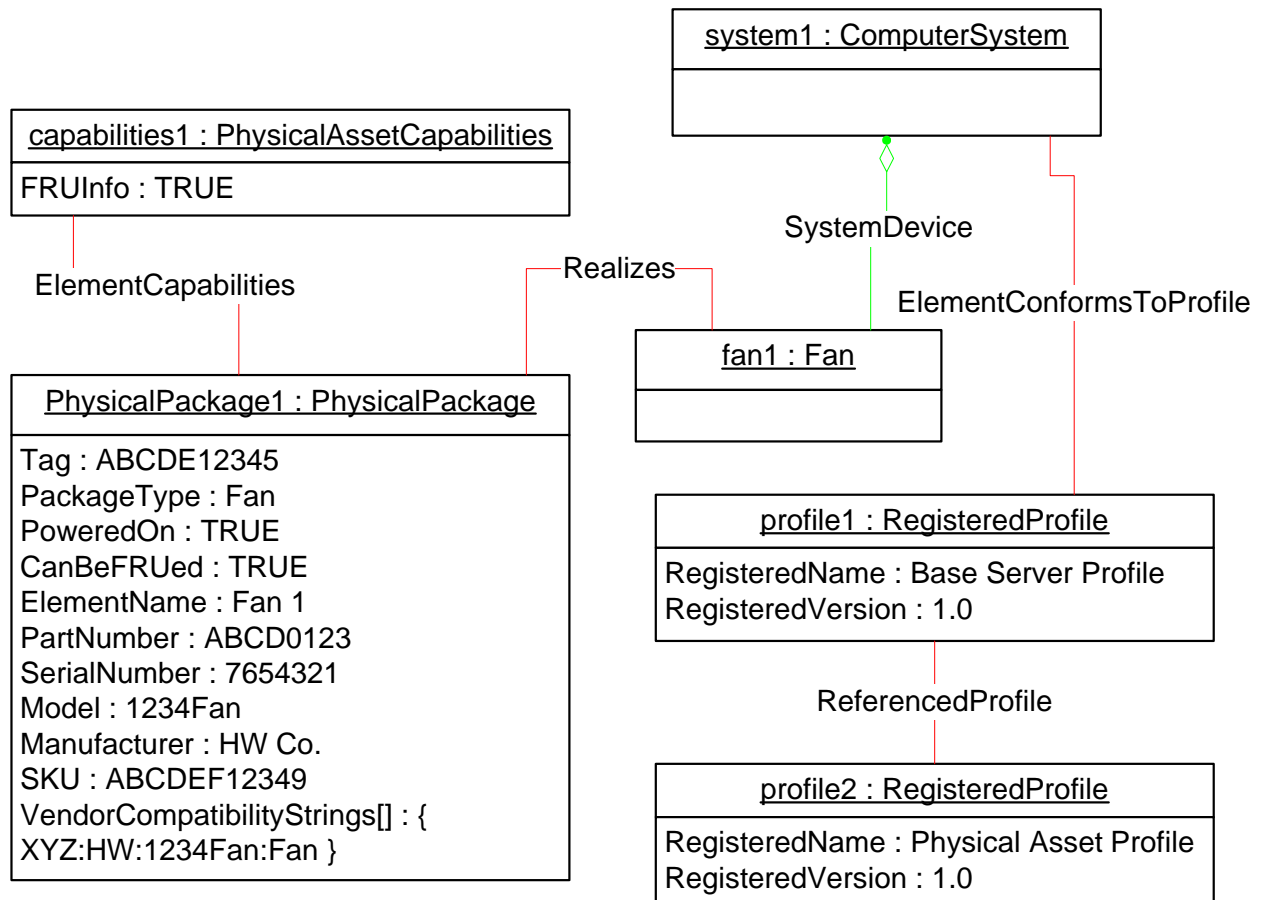


541

542

Figure 3 – CIM_PhysicalPackage Object Diagram

543 9.3 Finding the Scoping Instance for a Fan Package

544 Figure 4 represents another possible instantiation of *Physical Asset Profile*. To find the Scoping Instance
 545 of PhysicalPackage1, the client needs to select the fan1 associated through the CIM_Realizes
 546 association and then find the Scoping Instance for fan1. As defined in the *Fan Profile*, the Scoping
 547 Instance of fan1 is the CIM_ComputerSystem instance associated to fan1 through the
 548 CIM_SystemDevice association: system1. Thus, system1 is the Scoping Instance of PhysicalPackage1.
 549 By traversing through the CIM_ElementConformsToProfile and subsequently the CIM_ReferencedProfile
 550 association, the client can find profile2, which advertises the *Physical Asset Profile* information.

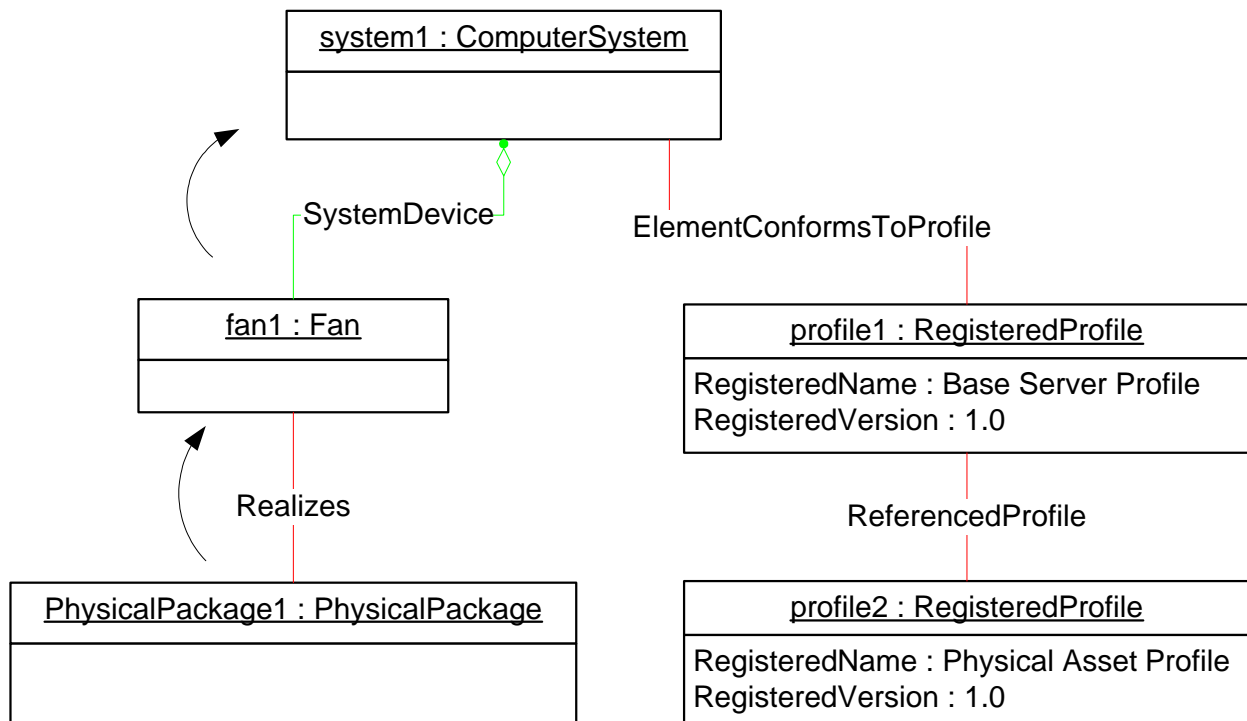

551


552

Figure 4 – Scoping Instance: Logical Device Object Diagram

553 9.4 Physical Topology and Finding the Scoping Instance

554 Figure 5 represents another possible instantiation of the *Physical Asset Profile*. To find the Scoping
 555 Instance of package1, because package1 is referenced by the CIM_ElementInConnector.Dependent
 556 property, the client needs to select connector1, which is referenced by the
 557 CIM_ElementInConnector.Antecedent property. Then, because connector1 is referenced by the
 558 CIM_Container.PartComponent property, the client needs to select card1, which is referenced by the
 559 CIM_Container.GroupComponent. Then, because card1 is referenced by the
 560 CIM_Container.PartComponent property, the client needs to select chassis1, which is referenced by the
 561 CIM_Container.GroupComponent. Then, because chassis1 is associated to system1 through the
 562 CIM_ComputerSystemPackage association, system1 is the Scoping Instance of package1. The client can
 563 traverse through the CIM_ElementConformsToProfile and, subsequently, the CIM_ReferencedProfile
 564 association, to find profile2, which advertises the *Physical Asset Profile* information.

565 **Note:** To enable finding the Scoping Instance of connector2, the implementation has instantiated an instance of
 566 CIM_Container that references card1 and connector2. Merely instantiating the instance of CIM_ConnectedTo
 567 referencing connector2 will not conform to the algorithm described in section 7.2.

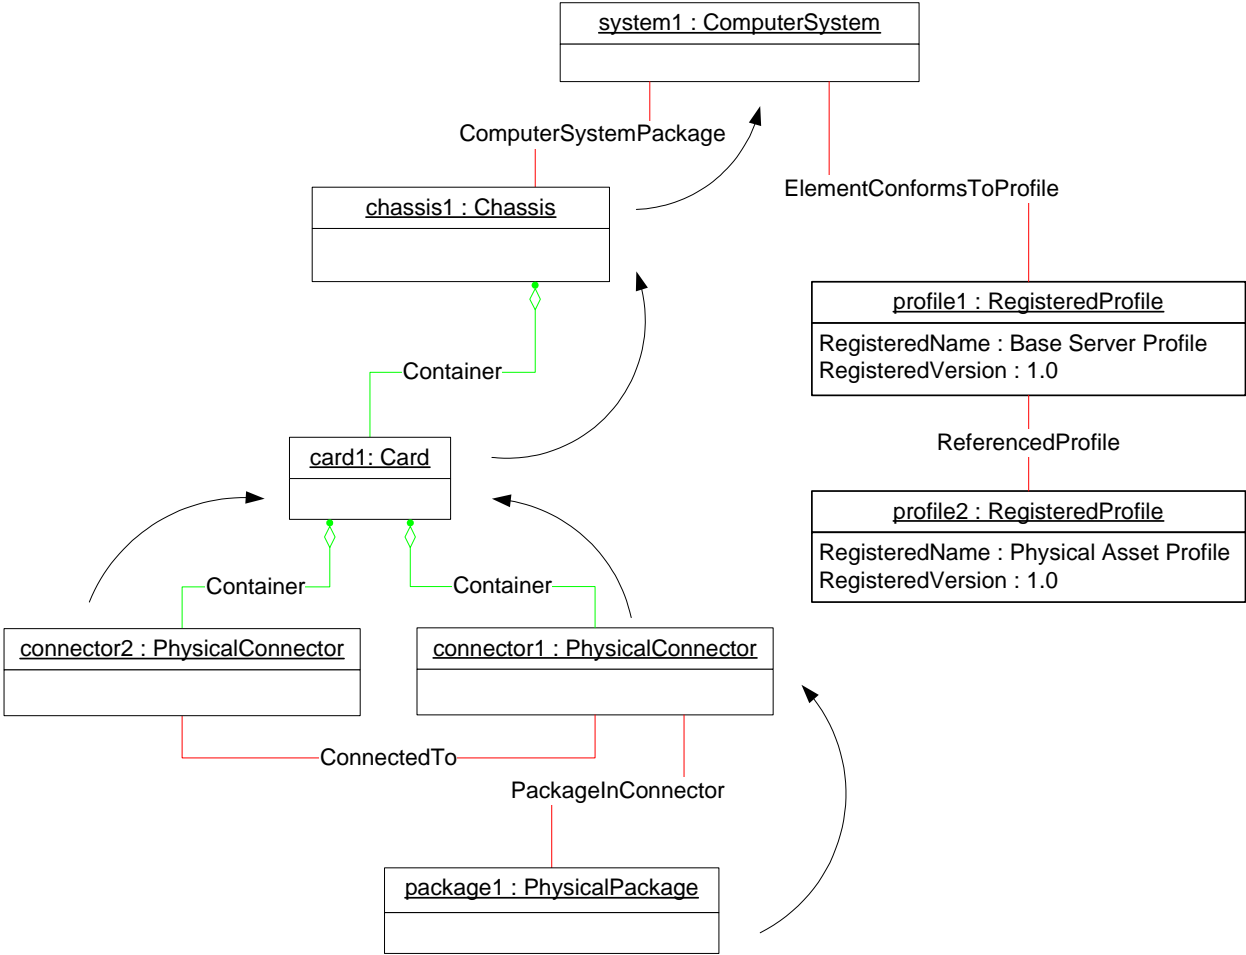


568

569

Figure 5 – Scoping Instance: Physical Topology Object Diagram

570 **9.5 Physical Topology**

571 Figure 6 represents another possible instantiation of the *Physical Asset Profile*. Chassis1 is a System
 572 Chassis of system1. Physicalpackage1 is a Physical Package for fan1. The physical topology of chassis1
 573 contains a single level because card1, slot1, chip1, pmem1, component1, connector1, and
 574 physicalpackage1 are all directly associated to chassis1 through the instances of CIM_Container.

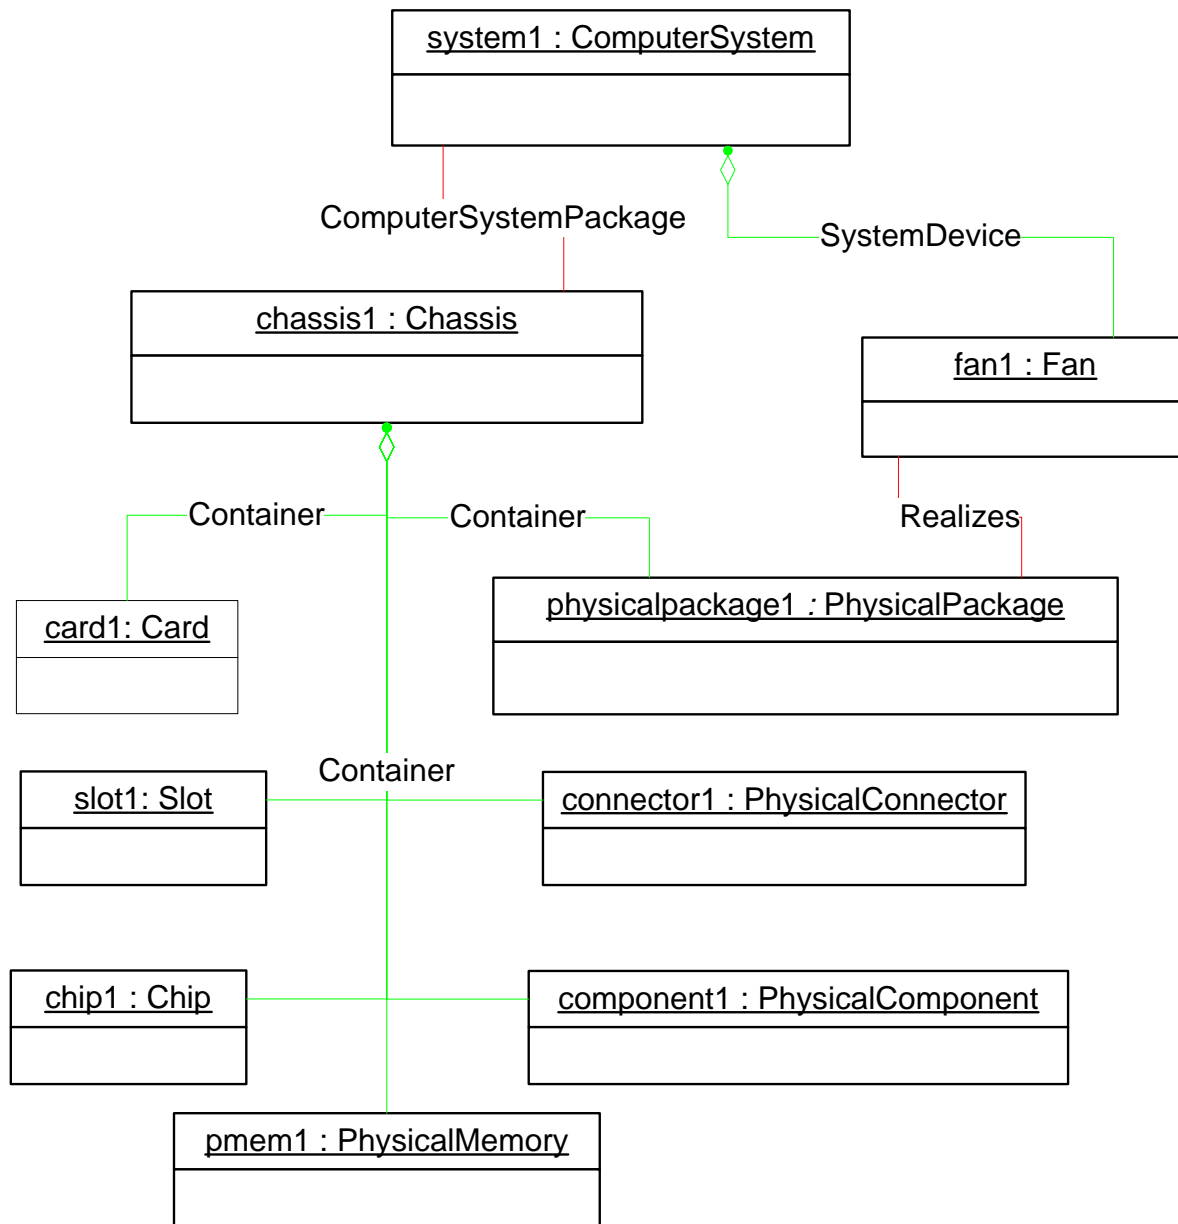


575

576

Figure 6 – Physical Asset Profile: Topology Object Diagram

577 **9.6 Physical Memory**

578 Figure 7 represents another possible instantiation of the *Physical Asset Profile*. System1's system
 579 memory is represented by Memory1. Memory1's physical aspects are represented by pmem1. chassis1 is
 580 a System Chassis of system1. chassis1 contains slot1, into which the memory package, memorypkg1, is
 581 plugged. memorypkg1 contains pmem1, the physical representation of the system memory, Memory1.

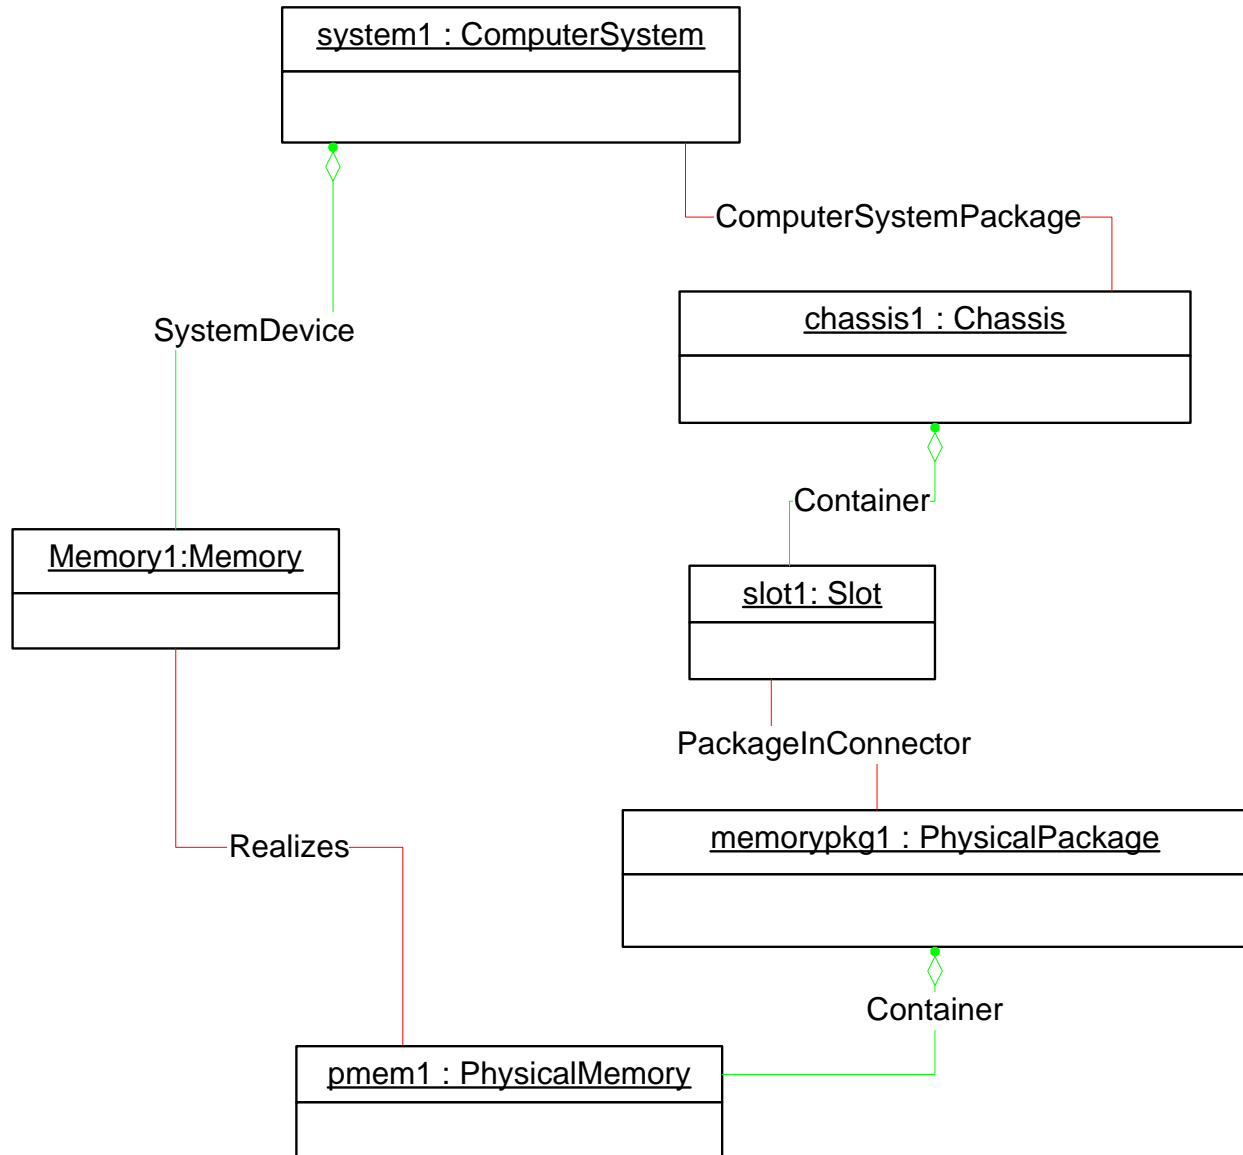


582

583

Figure 7 – Physical Memory Topology Object Diagram

584 **9.7 Representing Configuration Capacity**

585 Figure 8 represents another possible instantiation of the *Physical Asset Profile*. In this instantiation, the
 586 chassis1 has two slots: slot1 and slot2. The slots are compatible with any type of XYZ:HW:1235Fan
 587 packages, as advertised through the CIM_Slot.VendorCompatibilityStrings property. slot1 and package1,
 588 which is plugged into it, are compatible because the Delimited Substring matches for the
 589 VendorCompatibilityStrings property. slot2 and package2, which is plugged into it, are compatible
 590 because an element in the VendorCompatibilityStrings property of the CIM_Slot instance is a Delimited
 591 Substring of the element in the VendorCompatibilityStrings property of the CIM_PhysicalPackage
 592 instance. chassis1 also has a representation of its fan configuration capacity through capacity1. capacity1
 593 indicates that chassis1 can have a maximum of two fans and should have at least one fan.

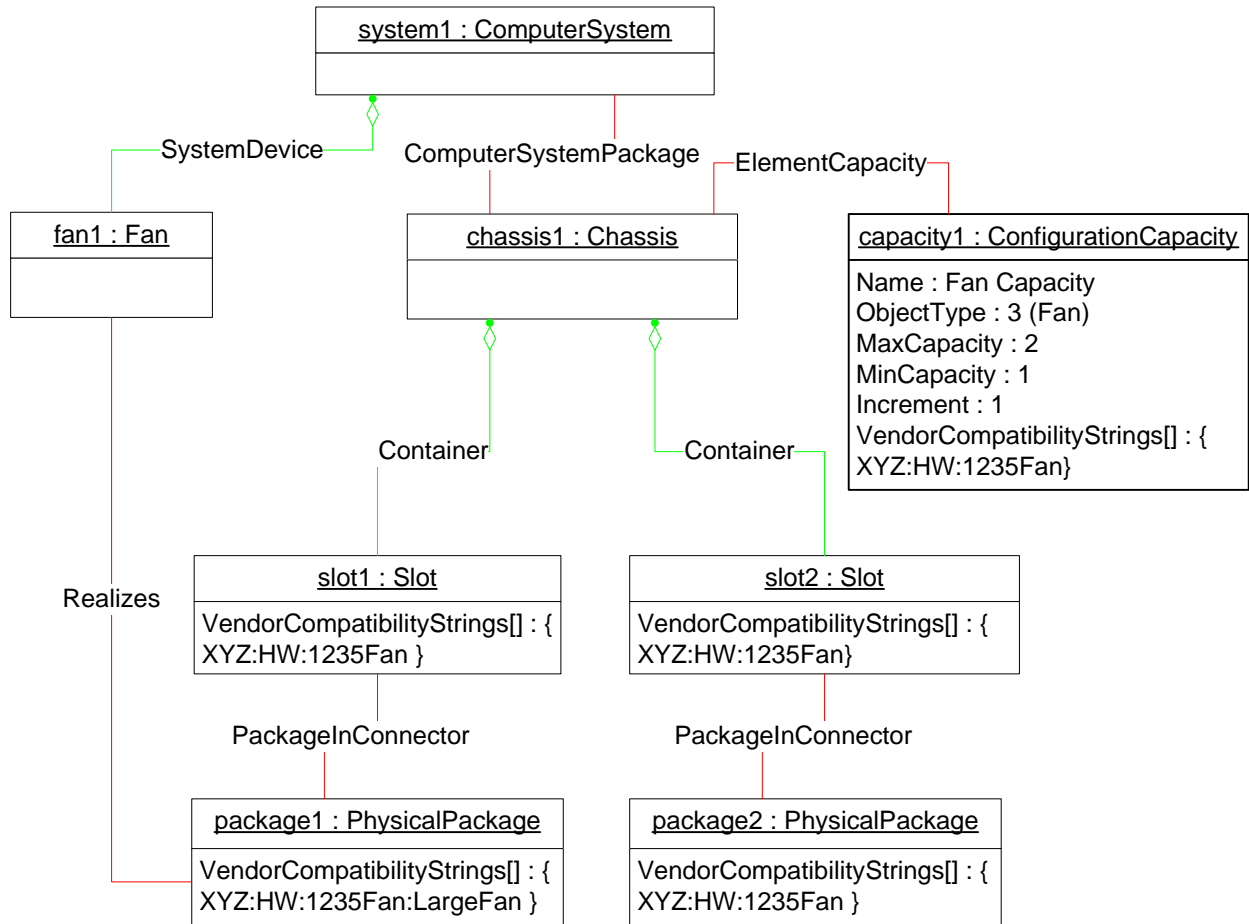


594

595

Figure 8 –Configuration Capacity Object Diagram

596 Figure 9 represents another possible instantiation of the *Physical Asset Profile*. In this instantiation, the
 597 chassis1 has two cards (card1 and card2) that hold processors. The configuration capacity for card1 is
 598 represented by capacity1 because they are associated through the instance of CIM_ElementCapacity. In
 599 the same way, card2's configuration capacity is represented by capacity2. Because the
 600 VendorCompatibilityStrings property value for capacity1 is equal to the VendorCompatibilityStrings
 601 property value for capacity2, the maximum number of compatible processors could be determined by
 602 adding the MaxCapacity property value of capacity1 to the MaxCapacity property value of capacity2. In this
 603 case, the chassis1 could contain a maximum of four processors.

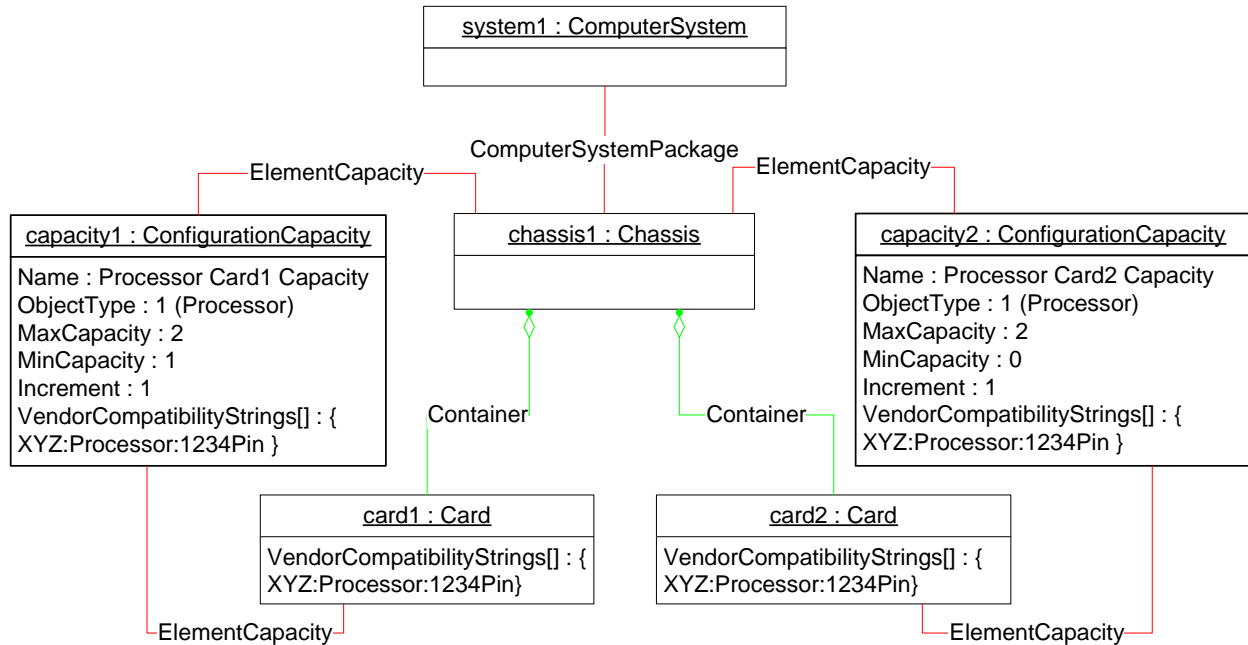


604

605

Figure 9 – Additional Configuration Capacity Object Diagram

606 9.8 Representing Physical Connector

607 Figure 10 represents another possible instantiation of the *Physical Asset Profile*. In this instance,
 608 chassis1 contains a network card, card1. card1 has an RJ45 connector, connector1. connector1 is the
 609 physical representation of nic1 network port within system1.

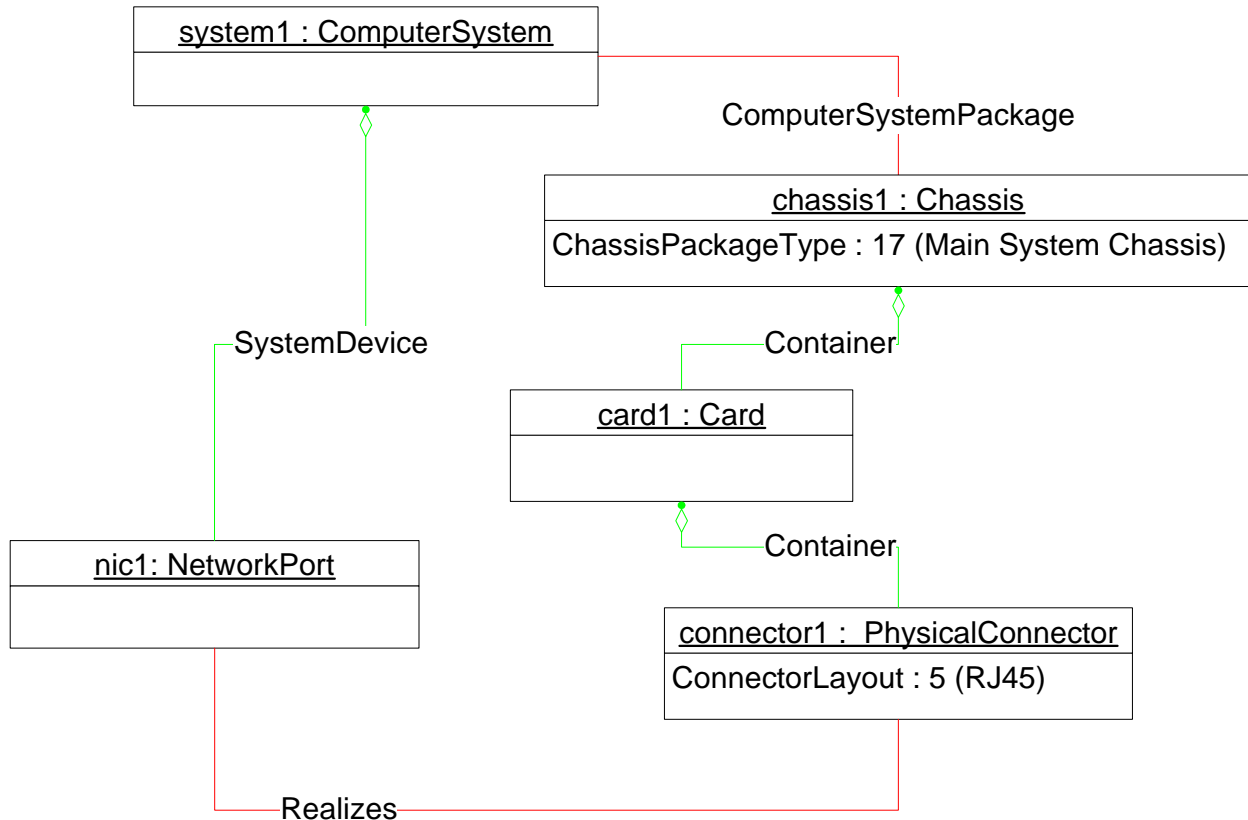

610

611

Figure 10 –Network Port Connector Object Diagram

612 9.9 Determining the Part Number of a Failing Component

613 Select the CIM_PhysicalElement subclass instance that is associated through the CIM_Realizes
 614 association to the CIM_LogicalDevice component that has a HealthState or OperationalStatus property
 615 value indicating that the component is in a failure mode. Get the PartNumber property value for the
 616 selected CIM_PhysicalElement subclass instance.

617 9.10 Obtaining the Physical Inventory for All Devices within a System

618 Select the CIM_System instance representing the given system. Select all the CIM_LogicalDevice
 619 subclass instances that are associated with the CIM_System instance through the CIM_SystemDevice
 620 association, and select all the CIM_System instances associated through CIM_SystemComponent
 621 associations, and then follow the CIM_SystemDevice association to select all the CIM_LogicalDevice
 622 subclass instances. Get all the property values of the CIM_PhysicalElement subclass instances that are
 623 associated to the selected CIM_LogicalDevice subclass instances through the CIM_Realizes association
 624 and to the selected CIM_System instances through the CIM_SystemPackage association.

625 **9.11 Obtaining the Physical Inventory for a System Chassis**

626 Get all the property values of the Physical Package instances that are associated through the
627 CIM_SystemPackaging association with the CIM_System instance representing the given system.

628 **9.12 Determining Whether the Slot Is Empty**

629 Select all the CIM_ElementInConnector instances that reference the CIM_Slot instance that represents
630 the given slot. If no instances of CIM_ElementInConnector that reference the CIM_Slot instance exist,
631 then the slot is empty; otherwise the slot is occupied by the physical package represented by the instance
632 of CIM_PhysicalPackage referenced by the CIM_ElementInConnector association instance.

633 **9.13 Retrieving the Fan Capacity for the Chassis**

634 For the CIM_Chassis instance that represents the given chassis, select the associated instances of
635 CIM_ConfigurationCapacity through the CIM_ElementCapacity associations. Select
636 CIM_ConfigurationCapacity instances that have the CIM_ConfigurationCapacity.ObjectType property of 3
637 (Fan).

638 **9.14 Retrieving the Maximum Capacity of the Type of Fan Package within the** 639 **Chassis**

640 The particular type of fan package is identified through the given string, which is an element of the
641 VendorCompatibilityStrings array property of the Physical Package representing the fan package.

642 Select all the instances of CIM_ConfigurationCapacity associated with the CIM_Chassis instance through
643 instances of CIM_ElementCapacity where the VendorCompatibiltyStrings array property of the instance of
644 CIM_ConfigurationCapacity contains elements equal to the given string. Add all the values for the
645 MaxCapacity property of the selected CIM_ConfigurationCapacity instances.

646 **10 CIM Elements**

647 Table 10 shows the mandatory instances of CIM Elements for this profile. Instances of the following CIM
648 Elements shall be implemented as described in Table 10 . Sections 7 (“Implementation”) and 8
649 (“Methods”) may impose additional requirements on these elements.

650 This profile contains definitions for non-abstract parent and child classes. All class definitions are treated
651 as leaf class definitions and the convention used is to replicate the properties in the following tables.

652

Table 10 – CIM Elements: Physical Asset Profile

Element Name	Requirement	Description
Classes		
CIM_Card	Conditional	See sections 7.1 and 10.1.
CIM_Chassis	Conditional	See sections 7.1 and 10.2.
CIM_Chip	Conditional	See sections 7.1 and 10.3.
CIM_ComputerSystemPackage	Conditional	See sections 7.1 and 10.4.
CIM_ConfigurationCapacity	Optional	See sections 7.7 and 10.5.
CIM_ConnectedTo	Optional	See section 10.6.
CIM_Container	Optional	See sections 7.1 and 10.7.
CIM_ElementCapabilities	Conditional	See section 10.8.
CIM_ElementCapacity	Conditional	See sections 7.7 and 10.9.
CIM_ElementInConnector	Optional	See sections 7.1 and 10.10.
CIM_PhysicalAssetCapabilities	Optional	See sections 7.4 and 10.11.
CIM_PhysicalComponent	Conditional	See sections 7.1 and 10.12.
CIM_PhysicalConnector	Conditional	See sections 7.1 and 10.13.
CIM_PhysicalFrame	Conditional	See sections 7.1 and 10.14.
CIM_PhysicalMemory	Conditional	See sections 7.1 and 10.15.
CIM_PhysicalPackage	Conditional	See sections 7.1 and 10.16.
CIM_Rack	Conditional	See sections 7.1 and 10.17.
CIM_Realizes	Conditional	See sections 7.1 and 10.18.
CIM_RegisteredProfile	Mandatory	See section 10.19.
CIM_Slot	Conditional	See sections 7.1 and 10.20.
CIM_SystemPackaging	Conditional	See sections 7.1 and 10.21.
Indications		
None defined in this profile		

653

NOTE: Abstract classes are not shown in the tables in the following sections.

654 **10.1 CIM_Card**

655 CIM_Card represents the processor card and its FRU data. Table 11 contains the requirements for
 656 properties of the instance.

657

Table 11 – Class: CIM_Card

Elements	Requirement	Notes
Tag	Mandatory	Key
CreationClassName	Mandatory	Key
HostingBoard	Optional	This property should be implemented.
PackageType	Mandatory	None
Manufacturer	Conditional	See section 7.4.
Model	Conditional	See section 7.4.
SerialNumber	Conditional	See section 7.4.
PartNumber	Conditional	See section 7.4.
SKU	Conditional	See section 7.4.
CanBeFRUed	Optional	This property should be implemented when the Physical Element can be replaced in the field.
VendorCompatibilityStrings	Optional	See section 7.5.
Version	Optional	The property shall be the hardware version.
Name	Optional	
ElementName	Mandatory	This property shall be formatted as a free-form string of variable length (pattern “.*”).

658 **10.2 CIM_Chassis**

659 CIM_Chassis represents the chassis and its FRU data. Table 12 contains the requirements for properties
660 of the instance.

661 **Table 12 – Class: CIM_Chassis**

Elements	Requirement	Notes
Tag	Mandatory	Key
CreationClassName	Mandatory	Key
PackageType	Mandatory	This property shall match 3 (Chassis/Frame).
ChassisPackageType	Mandatory	None
Manufacturer	Conditional	See section 7.4.
Model	Conditional	See section 7.4.
SerialNumber	Conditional	See section 7.4.
PartNumber	Conditional	See section 7.4.
SKU	Conditional	See section 7.4.
CanBeFRUed	Optional	This property should be implemented when the Physical Element can be replaced in the field.
VendorCompatibilityStrings	Mandatory	See section 7.5.
Version	Optional	The property shall be the hardware version.
Name	Optional	
ElementName	Mandatory	This property shall be formatted as a free-form string of variable length (pattern “.*”).

662 **10.3 CIM_Chip**

663 CIM_Chip represents the chip and its FRU data. Table 13 contains the requirements for properties of the
664 instance.

665 **Table 13 – Class: CIM_Chip**

Elements	Requirement	Notes
Tag	Mandatory	Key
CreationClassName	Mandatory	Key
Manufacturer	Conditional	See section 7.4.
Model	Conditional	See section 7.4.
SerialNumber	Conditional	See section 7.4.
PartNumber	Conditional	See section 7.4.
SKU	Conditional	See section 7.4.
CanBeFRUed	Optional	This property should be implemented when the Physical Element can be replaced in the field.
ElementName	Mandatory	This property shall be formatted as a free-form string of variable length (pattern “.*”).

666 **10.4 CIM_ComputerSystemPackage**

667 CIM_ComputerSystemPackage associates CIM_ComputerSystem, representing the managed system,
 668 with a System Chassis. Table 14 contains the requirements for properties of the instance.

669 **Table 14 – Class: CIM_ComputerSystemPackage**

Elements	Requirement	Notes
Antecedent	Mandatory	Key: This property shall reference the System Chassis. Cardinality * (indicating zero or many references)
Dependent	Mandatory	Key: This property shall reference the CIM_ComputerSystem representing the managed system. Cardinality * (indicating zero or many references)
PlatformGUID	Mandatory	This property shall match “[0.9A.F]{32}\$” or, when unknown, shall match “0” .

670 **10.5 CIM_ConfigurationCapacity**

671 CIM_ConfigurationCapacity advertises the possible configuration of a System Chassis. Table 15 contains
 672 the requirements for properties of the instance.

673 **Table 15 – Class: CIM_ConfigurationCapacity**

Elements	Requirement	Notes
Name	Mandatory	Key
ElementName	Mandatory	None
ObjectType	Mandatory	None
OtherTypeDescription	Conditional	This property shall be implemented when ObjectType matches 0 (Other).
MinimumCapacity	Optional	This property should be implemented.
MaximumCapacity	Mandatory	0 shall mean unknown.
Increment	Mandatory	0 shall mean unknown.
VendorCompatibilityStrings	Mandatory	See section 7.5.

674 **10.6 CIM_ConnectedTo**

675 CIM_ConnectedTo associates the CIM_PhysicalConnector or CIM_Slot instances that represent
 676 connectors that are connected together. Table 16 contains the requirements for properties of the
 677 instance.

678 **Table 16 – Class: CIM_ConnectedTo**

Elements	Requirement	Notes
Antecedent	Mandatory	Key: This property shall reference the CIM_PhysicalConnector or CIM_Slot instance. Cardinality * (indicating zero or many references)
Dependent	Mandatory	Key: This property shall reference the CIM_PhysicalConnector or CIM_Slot instance. Cardinality * (indicating zero or many references)

679 **10.7 CIM_Container**

680 CIM_Container associates a Physical Package with Physical Elements representing the physical
 681 elements that reside within the package. Table 17 contains the requirements for properties of the
 682 instance.

683 **Table 17 – Class: CIM_Container**

Elements	Requirement	Notes
GroupComponent	Mandatory	Key: This property shall reference the Physical Package that represents the container. Cardinality 0.1 (indicating zero or one reference)
PartComponent	Mandatory	Key: This property shall reference the Physical Element that is contained within the package. Cardinality * (indicating zero or many references)

684 **10.8 CIM_ElementCapabilities**

685 CIM_ElementCapabilities associates Physical Elements with the CIM_PhysicalAssetCapabilities
 686 instances that advertise the physical capabilities. CIM_ElementCapabilities shall be instantiated when an
 687 instance of CIM_PhysicalAssetCapabilities exists. Table 18 contains the requirements for properties of
 688 the instance.

689 **Table 18 – Class: CIM_ElementCapabilities**

Elements	Requirement	Notes
ManagedElement	Mandatory	Key: This property shall reference the Physical Element. Cardinality 1.* (indicating one or many references)
Capabilities	Mandatory	Key: This property shall reference the CIM_PhysicalAssetCapabilities class. Cardinality 0.1 (indicating zero or one reference)

690 **10.9 CIM_ElementCapacity**

691 CIM_ElementCapacity associates CIM_ConfigurationCapacity instances with a System Chassis. Table 19
 692 contains the requirements for properties of the instance.

693 **Table 19 – Class: CIM_ElementCapacity**

Elements	Requirement	Notes
Capacity	Mandatory	Key: This property shall reference the CIM_ConfigurationCapacity instance. Cardinality * indicating zero or many references
Element	Mandatory	Key: This property shall reference the System Chassis or Physical Package. Cardinality 1.* (indicating one or many references)

694 **10.10 CIM_ElementInConnector**

695 CIM_ElementInConnector associates a CIM_PhysicalConnector or CIM_Slot instance, representing the
 696 connector or slot, with Physical Packages (instances of CIM_PhysicalPackage or
 697 CIM_PhysicalComponent). Table 20 contains the requirements for properties of the instance.

698 **Table 20 – Class: CIM_ElementInConnector**

Elements	Requirement	Notes
Antecedent	Mandatory	Key: This property shall reference the instance of CIM_PhysicalConnector or CIM_Slot. Cardinality * (indicating zero or many references)
Dependent	Mandatory	Key: This property shall reference the CIM_PhysicalPackage or CIM_PhysicalComponent. Cardinality 0.1 (indicating zero or one reference)

699 **10.11 CIM_PhysicalAssetCapabilities**

700 CIM_PhysicalAssetCapabilities advertises whether the associated instance of a CIM_PhysicalElement
 701 subclass contains FRU data. Table 21 contains the requirements for properties of the instance.

702 **Table 21 – Class: CIM_PhysicalAssetCapabilities**

Elements	Requirement	Notes
InstanceID	Mandatory	Key
ElementName	Mandatory	None
FRUInfoSupported	Mandatory	See section 7.4.

703 **10.12 CIM_PhysicalComponent**

704 CIM_PhysicalComponent represents any physical element that cannot be further decomposed, such as
 705 ASIC or tape, and its FRU data. Table 22 contains the requirements for properties of the instance.

706 **Table 22 – Class: CIM_PhysicalComponent**

Elements	Requirement	Notes
Tag	Mandatory	Key
CreationClassName	Mandatory	Key
Manufacturer	Conditional	See section 7.4.
Model	Conditional	See section 7.4.
SerialNumber	Conditional	See section 7.4.
PartNumber	Conditional	See section 7.4.
SKU	Conditional	See section 7.4.
CanBeFRUed	Optional	This property should be implemented when the Physical Element can be replaced in the field.
ElementName	Mandatory	This property shall be formatted as a free-form string of variable length (pattern “. *”).

707 **10.13 CIM_PhysicalConnector**

708 CIM_PhysicalConnector represents the physical connector. Table 23 contains the requirements for
 709 properties of the instance.

710 **Table 23 – Class: CIM_PhysicalConnector**

Elements	Requirement	Notes
Tag	Mandatory	Key
CreationClassName	Mandatory	Key
ConnectorLayout	Mandatory	None
Manufacturer	Conditional	See section 7.4.
Model	Conditional	See section 7.4.
SerialNumber	Conditional	See section 7.4.
PartNumber	Conditional	See section 7.4.
SKU	Conditional	See section 7.4.
ElementName	Mandatory	This property shall be formatted as a free-form string of variable length (pattern “. *”).

711 **10.14 CIM_PhysicalFrame**

712 CIM_PhysicalFrame represents the frame and its FRU data. Table 24 contains the requirements for
 713 properties of the instance.

714 **Table 24 – Class: CIM_PhysicalFrame**

Elements	Requirement	Notes
Tag	Mandatory	Key
CreationClassName	Mandatory	Key
PackageType	Mandatory	None
Manufacturer	Conditional	See section 7.4.
Model	Conditional	See section 7.4.
SerialNumber	Conditional	See section 7.4.
PartNumber	Conditional	See section 7.4.
SKU	Conditional	See section 7.4.
VendorCompatibilityStrings	Mandatory	See section 7.5.
CanBeFRUed	Optional	This property should be implemented when the Physical Element can be replaced in the field.
Version	Optional	The property shall be the hardware version.
Name	Optional	
ElementName	Mandatory	This property shall be formatted as a free-form string of variable length (pattern “. *”).

715 **10.15 CIM_PhysicalMemory**

716 CIM_PhysicalMemory represents the physical memory and its FRU data. Table 25 contains the
717 requirements for properties of the instance.

718 **Table 25 – Class: CIM_PhysicalMemory**

Elements	Requirement	Notes
Tag	Mandatory	Key
CreationClassName	Mandatory	Key
FormFactor	Mandatory	None
MemoryType	Mandatory	None
Speed	Mandatory	None
Capacity	Mandatory	None
BankLabel	Mandatory	None
Manufacturer	Conditional	See section 7.4.
Model	Conditional	See section 7.4.
SerialNumber	Conditional	See section 7.4.
PartNumber	Conditional	See section 7.4.
SKU	Conditional	See section 7.4.
CanBeFRUed	Optional	This property should be implemented when the Physical Element can be replaced in the field.
ElementName	Mandatory	This property shall be formatted as a free-form string of variable length (pattern “.*”).

719 **10.16 CIM_PhysicalPackage**

720 CIM_PhysicalPackage represents the physical package and its FRU data. Table 26 contains the
721 requirements for properties of the instance.

722 **Table 26 – Class: CIM_PhysicalPackage**

Elements	Requirement	Notes
Tag	Mandatory	Key
CreationClassName	Mandatory	Key
PackageType	Mandatory	None
Manufacturer	Conditional	See section 7.4.
Model	Conditional	See section 7.4.
SerialNumber	Conditional	See section 7.4.
PartNumber	Conditional	See section 7.4.
SKU	Conditional	See section 7.4.
VendorCompatibilityStrings	Mandatory	See section 7.5.
CanBeFRUed	Optional	This property should be implemented when the Physical Element can be replaced in the field.
Version	Optional	The property shall be the hardware version.
Name	Optional	
ElementName	Mandatory	This property shall be formatted as a free-form string of variable length (pattern “.*”).

723 **10.17 CIM_Rack**

724 CIM_Rack represents the rack and its FRU data. Table 27 contains the requirements for properties of the
725 instance.

726 **Table 27 – Class: CIM_Rack**

Elements	Requirement	Notes
Tag	Mandatory	Key
CreationClassName	Mandatory	Key
TypeOfRack	Mandatory	None
PackageType	Mandatory	This property shall match 2 (Rack).
Manufacturer	Conditional	See section 7.4.
Model	Conditional	See section 7.4.
SerialNumber	Conditional	See section 7.4.
PartNumber	Conditional	See section 7.4.
SKU	Conditional	See section 7.4.
VendorCompatibilityStrings	Mandatory	See section 7.5.
CanBeFRUed	Optional	This property should be implemented when the Physical Element can be replaced in the field.
Version	Optional	The property shall be the hardware version.
Name	Optional	
ElementName	Mandatory	This property shall be formatted as a free-form string of variable length (pattern “.*”).

727 **10.18 CIM_Realizes**

728 CIM_Realizes associates an instance of a CIM_LogicalDevice subclass, representing the logical device,
729 with a Physical Element. Table 28 contains the requirements for properties of the instance.

730 **Table 28 – Class: CIM_Realizes**

Elements	Requirement	Notes
Antecedent	Mandatory	Key: shall reference the Physical Element. Cardinality 1.* indicating one or many references
Dependent	Mandatory	Key: shall reference the instance of subclass of CIM_LogicalDevice Cardinality * indicating zero or many references

731 **10.19 CIM_RegisteredProfile**

732 The CIM_RegisteredProfile class is defined by the *Profile Registration Profile*. Table 29 contains the
733 requirements for properties of the class.

734 The requirements listed in Table 29 are in addition to those mandated by the *Profile Registration Profile*.

735 **Table 29 – Class: CIM_RegisteredProfile**

Elements	Requirement	Description
RegisteredName	Mandatory	This property shall have a value of “ <i>Physical Asset</i> ”.

RegisteredVersion	Mandatory	This property shall have a value of "1.0.0".
RegisteredOrganization	Mandatory	This property shall have a value of 2 (DMTF).

736 Note: Previous versions of this document included the suffix 'Profile' for the RegisteredName value. If
737 implementations querying for RegisteredName value find the suffix 'Profile', they should ignore the suffix,
738 with any surrounding white spaces, before any comparison is done with the value as specified in this
739 document.

740 10.20 CIM_Slot

741 CIM_Slot represents the slot and its FRU data. Table 30 contains the requirements for properties of the
742 instance.

743 **Table 30 – Class: CIM_Slot**

Elements	Requirement	Notes
Tag	Mandatory	Key
CreationClassName	Mandatory	Key
Number	Mandatory	None
ConnectorLayout	Mandatory	None
Manufacturer	Conditional	See section 7.4,
Model	Conditional	See section 7.4,
SerialNumber	Conditional	See section 7.4,
PartNumber	Conditional	See section 7.4,
SKU	Conditional	See section 7.4,
VendorCompatibilityStrings	Mandatory	See section 7.5,
ElementName	Mandatory	This property shall be formatted as a free-form string of variable length (pattern ".*").

744 10.21 CIM_SystemPackaging

745 CIM_SystemPackaging associates CIM_System, which represents the managed system, with a System
746 Chassis. Table 31 contains the requirements for properties of the instance.

747 **Table 31 – Class: CIM_SystemPackaging**

Elements	Requirement	Notes
Antecedent	Mandatory	Key: This property shall reference the System Chassis. Cardinality * (indicating zero or many references)
Dependent	Mandatory	Key: This property shall reference the CIM_System representing the managed system. Cardinality * (indicating zero or many references)

748

749
750
751
752
753

ANNEX A (informative)

Change Log

Version	Date	Description
1.0.0b	06/28/2006	Preliminary Standard
1.0.0	12/11/2007	Final Standard

754

755
756
757
758
759

760
761
762
763
764

765
766
767
768
769
770
771
772
773
774

775
776

**ANNEX B
(informative)**

Acknowledgments

The authors wish to acknowledge the following people.

Editors:

- Jon Hass – Dell Inc.
- Khachatur Papanyan – Dell Inc.
- Jeff Hilland - HP

Contributors:

- Jon Hass – Dell
- Khachatur Papanyan – Dell
- Jeff Hilland – HP
- Christina Shaw – HP
- Aaron Merkin – IBM
- Jeff Lynch – IBM
- Arvind Kumar – Intel
- Perry Vincent – Intel
- John Leung – Intel